
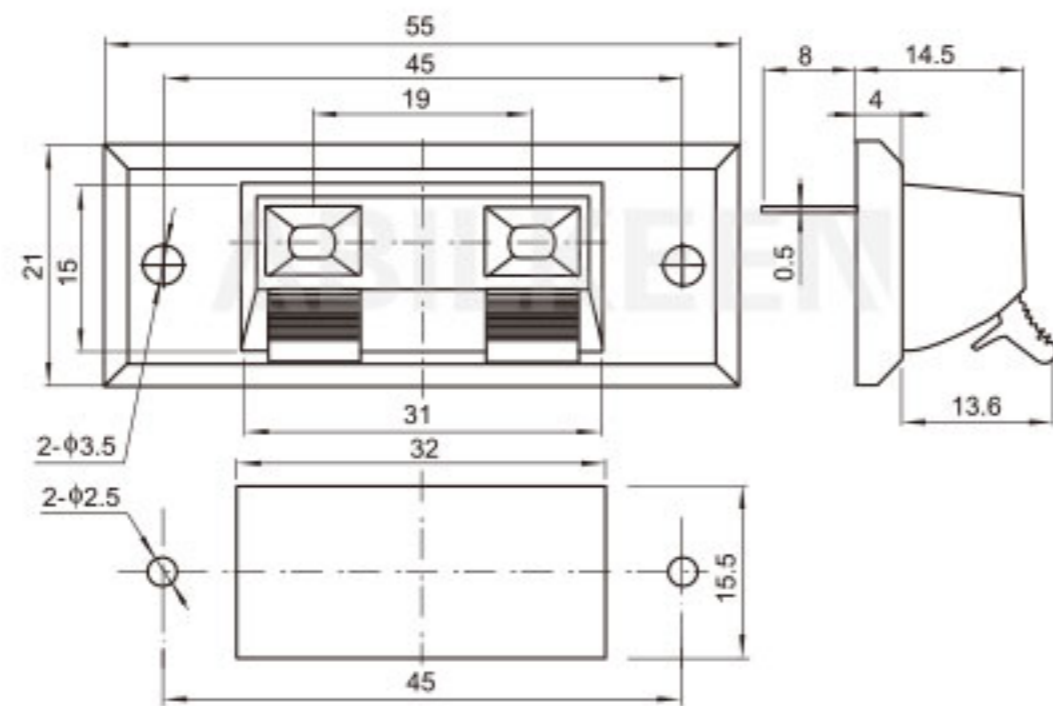



Specifications For WP Push Terminal Series

Project 项目	Parameter 参数
适用线材 Wire Range	AWG24#-16#
接触电阻 Contact Resistance	≤ 30mΩ
绝缘电阻 Insulation Resistance	≥ 100MΩ 500VDC
额定负荷 Rated load	AC 50V 3A



Project 项目	Parameter 参数
耐电压 Withstand Voltage	AC 500V(50Hz)/min
温度范围 Temperature	-40℃ ~ +75℃
电气寿命 Electric Life	≥ 10,000 Cycles
线保持力 Keep Wire Force	1Kgf

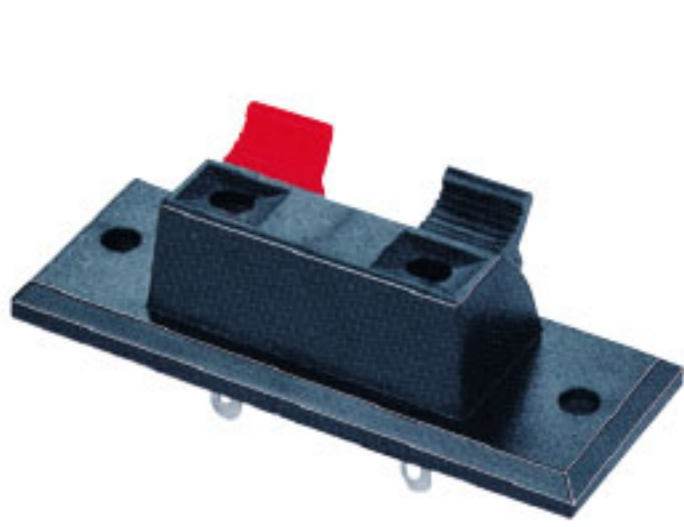


WP-002

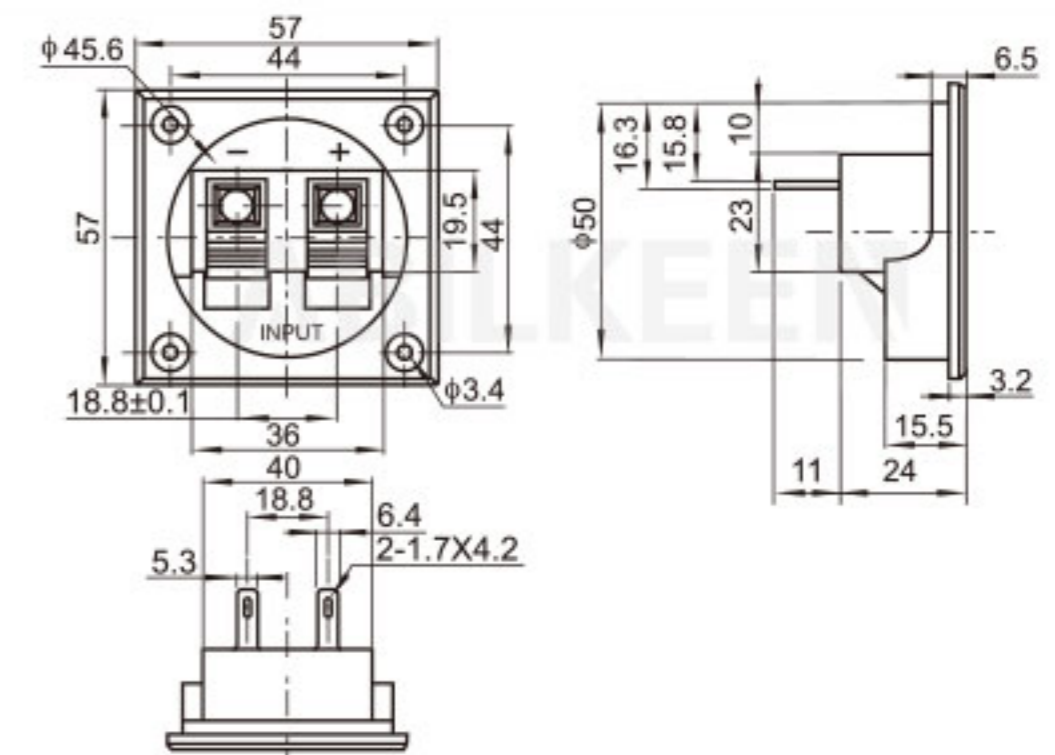


WP-010

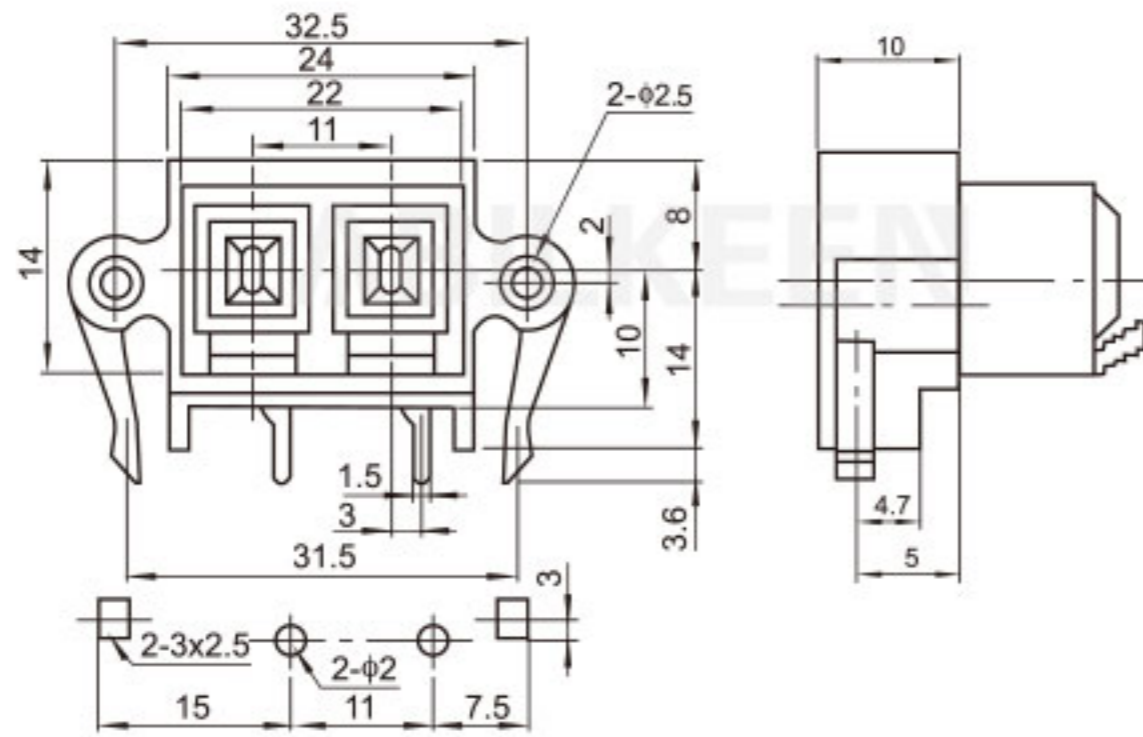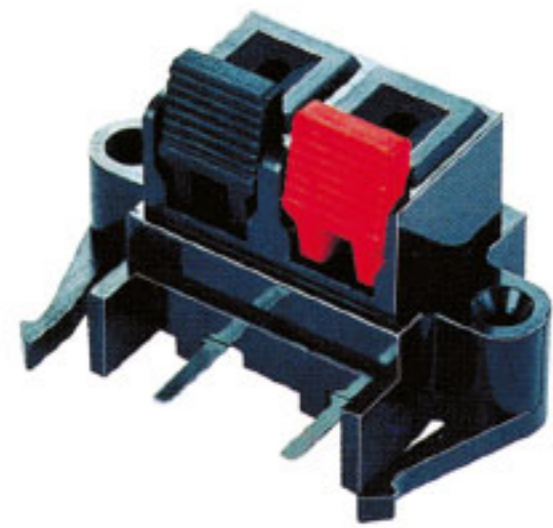


WP-003

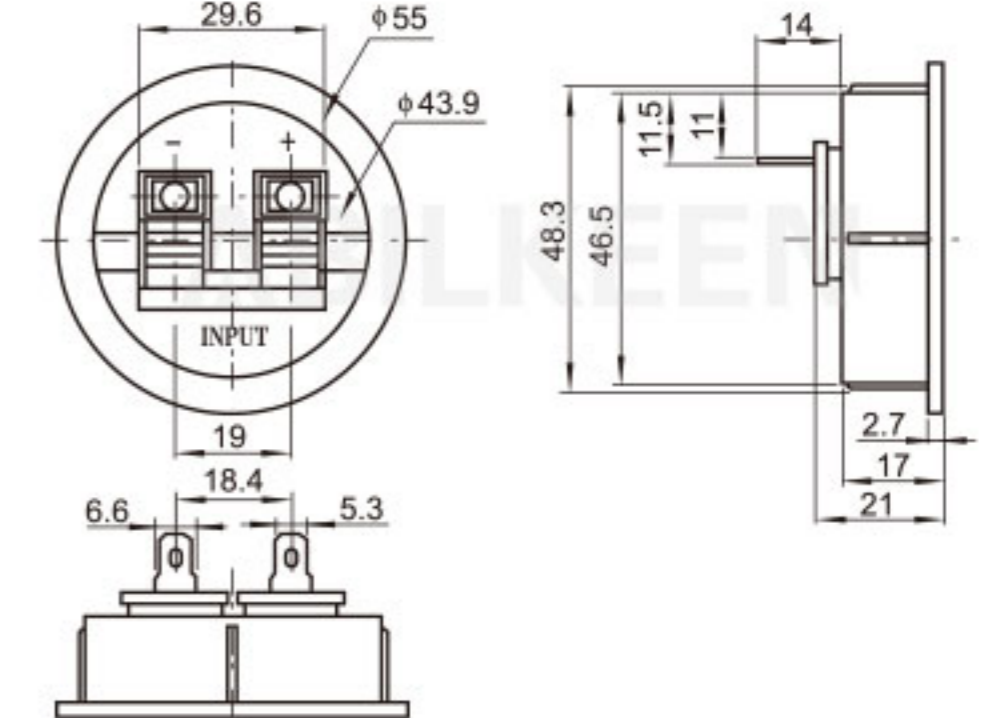



WP-011

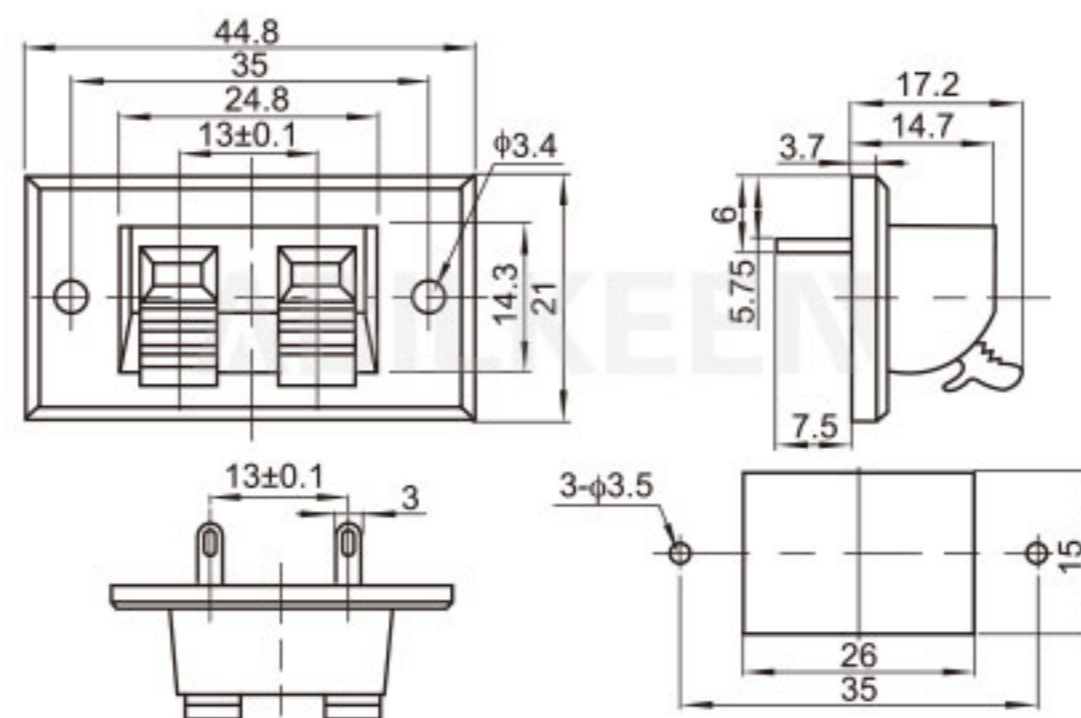


WP-004

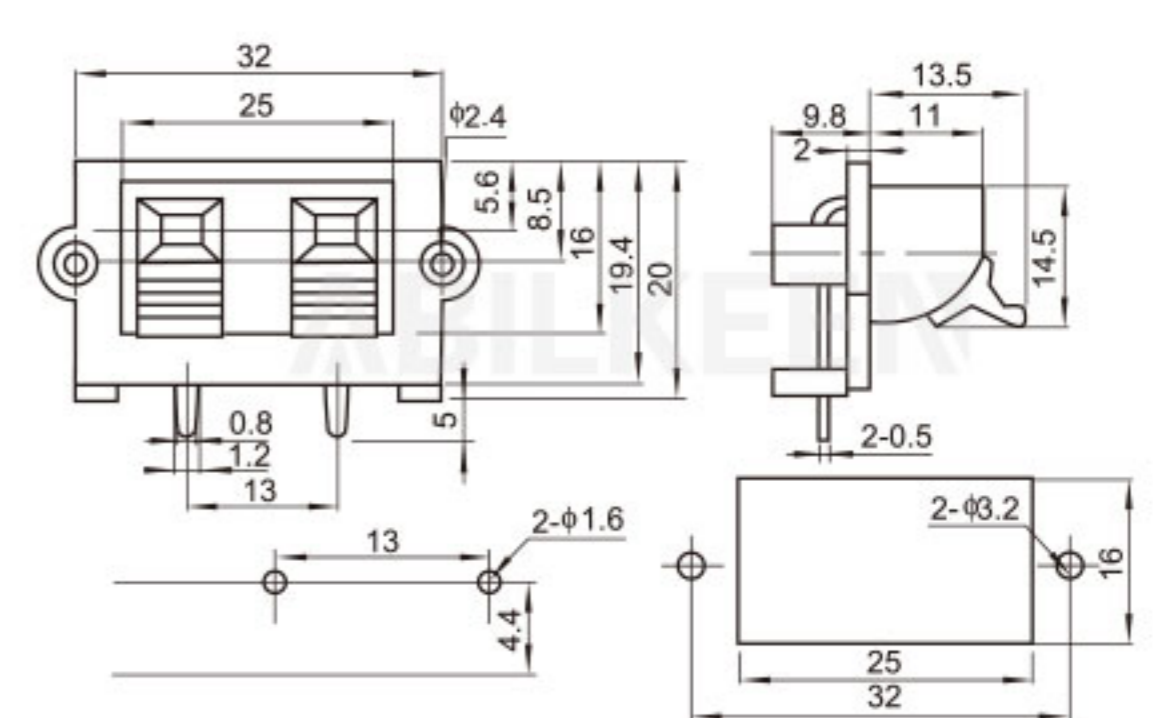



WP-013

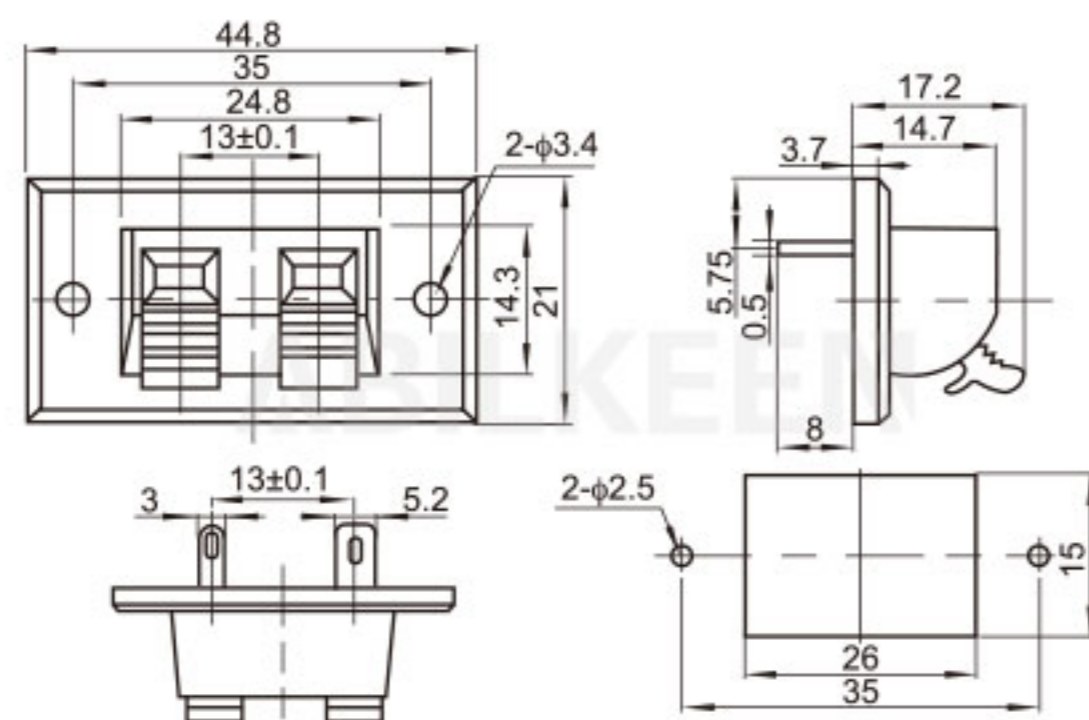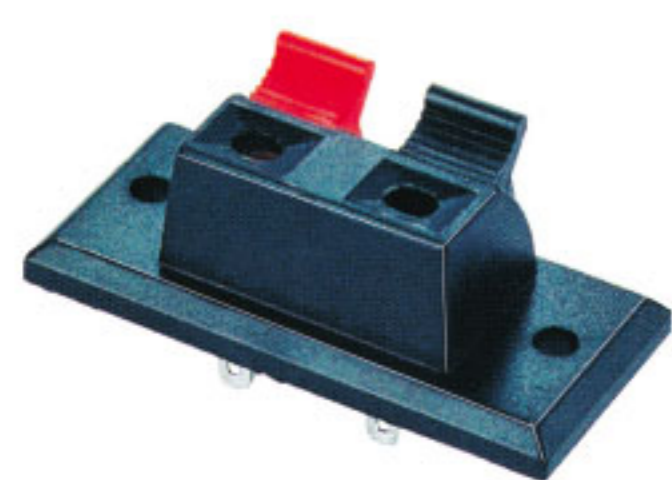


WP-005

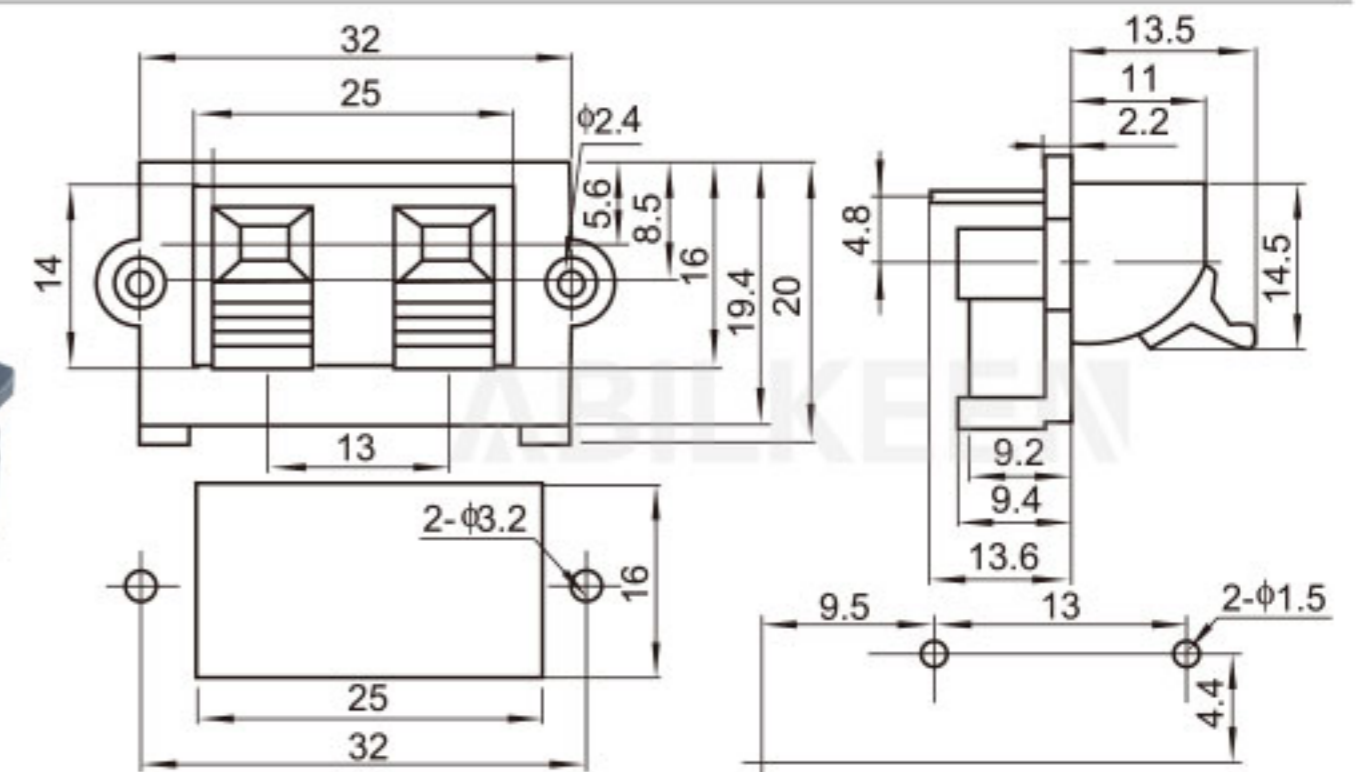



WP-014

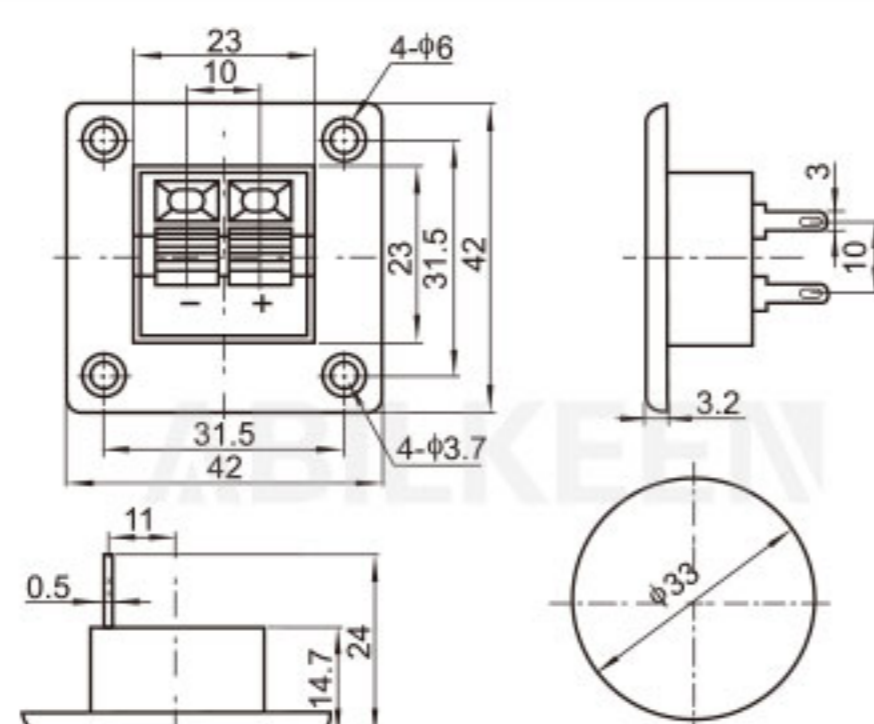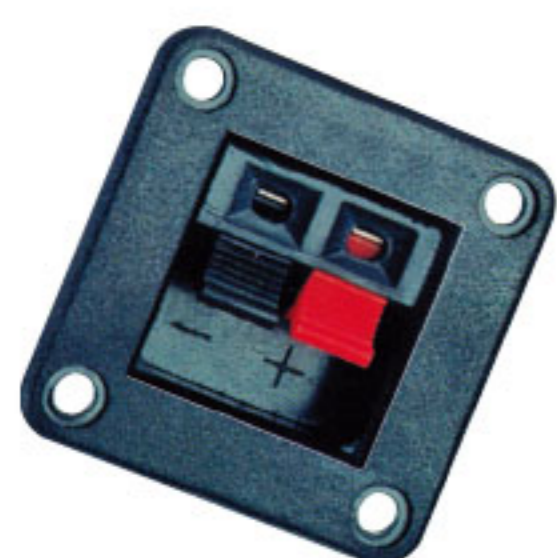


WP-007

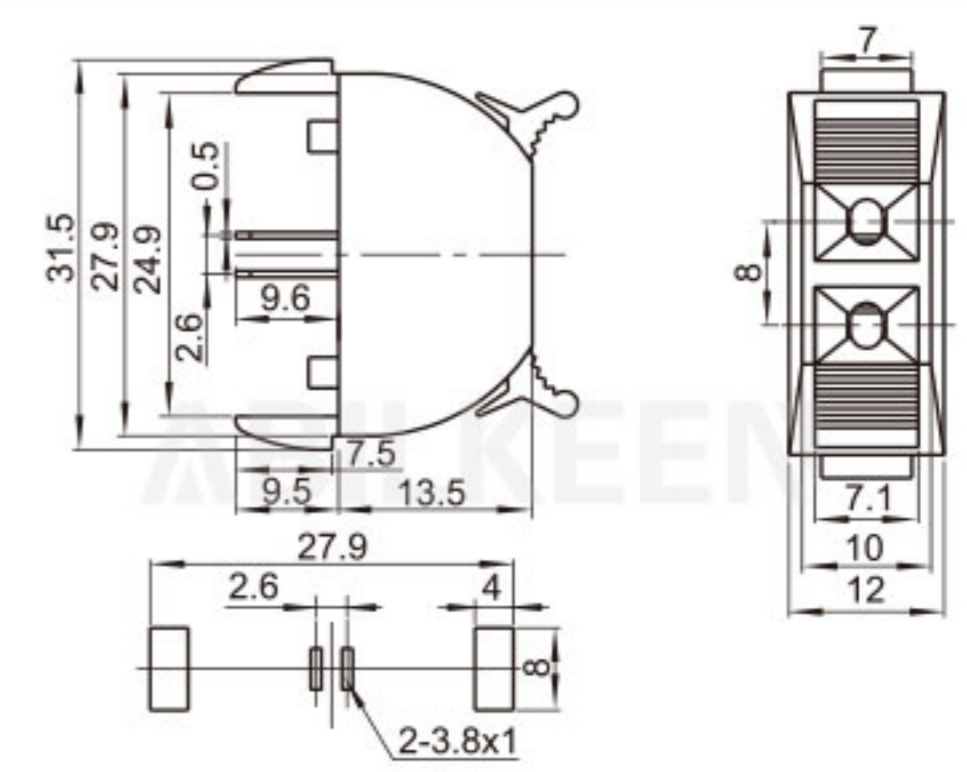


WP-017

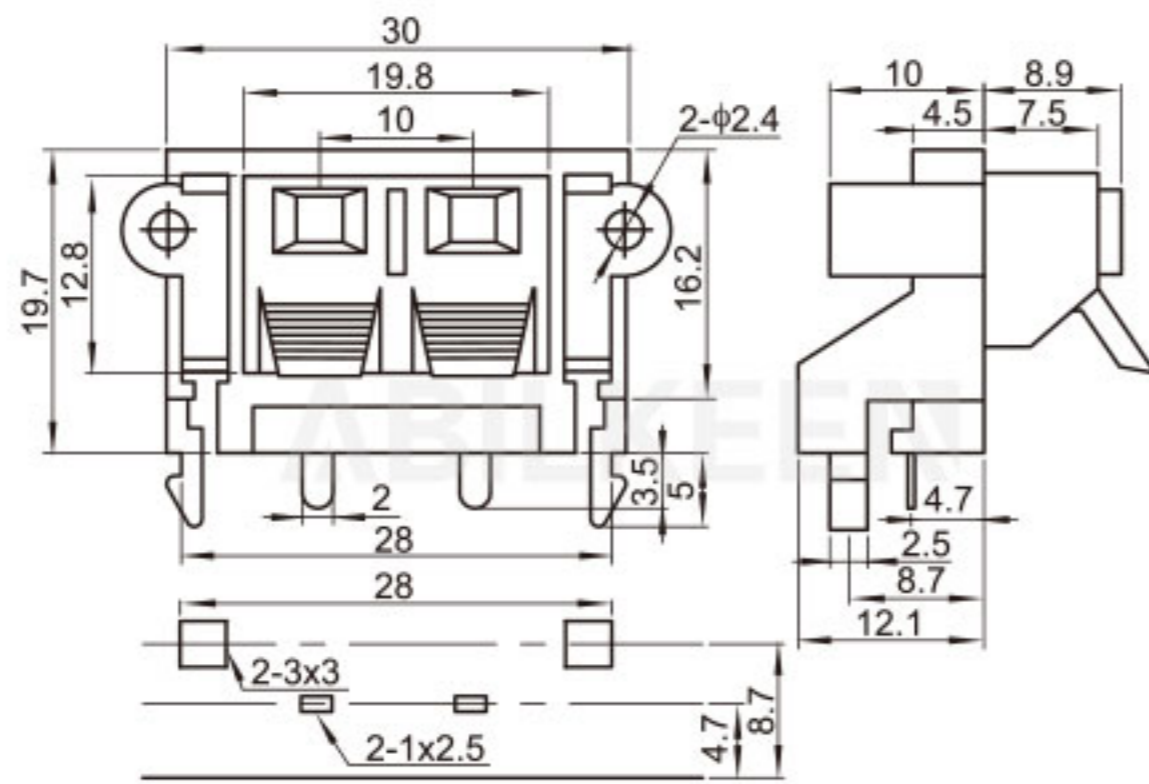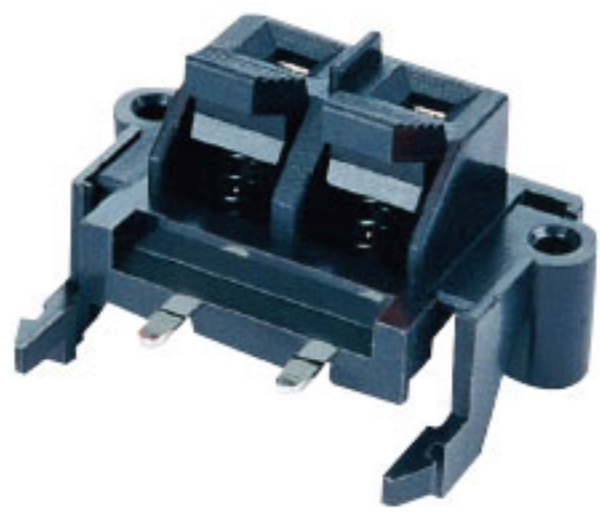


WP-022

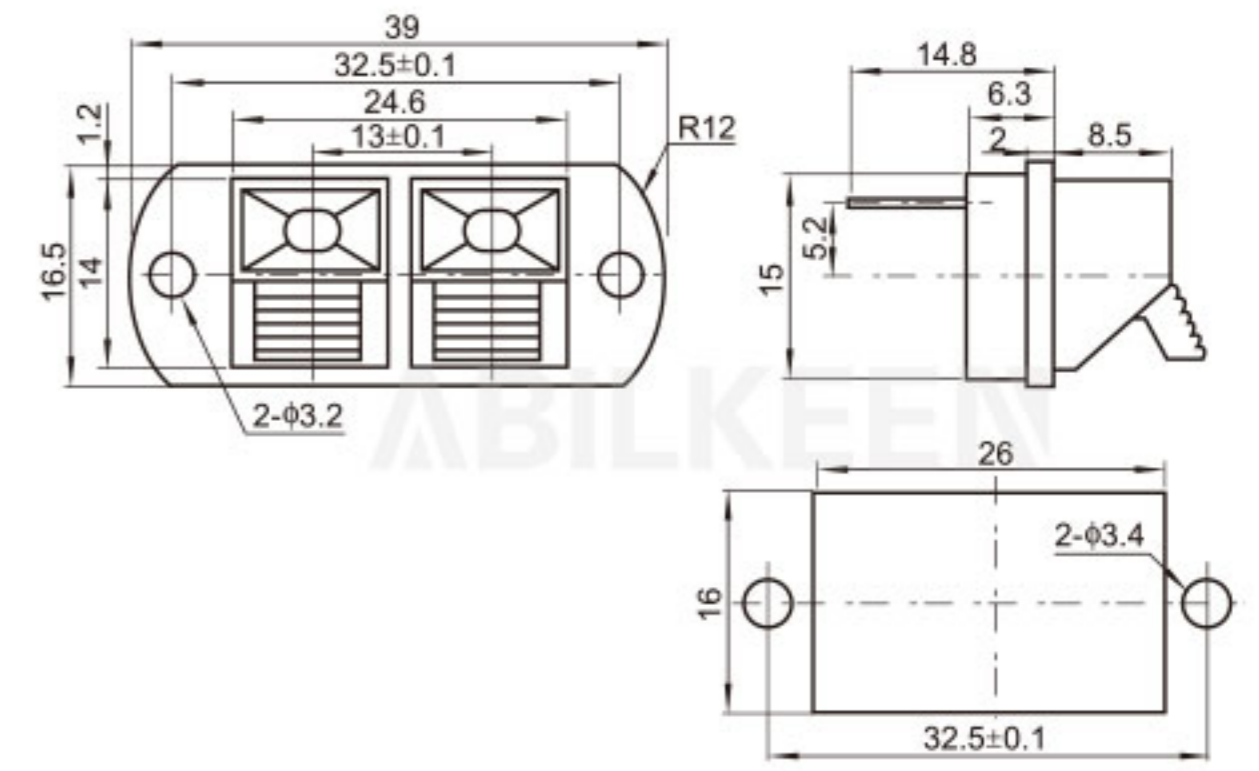


WP-032

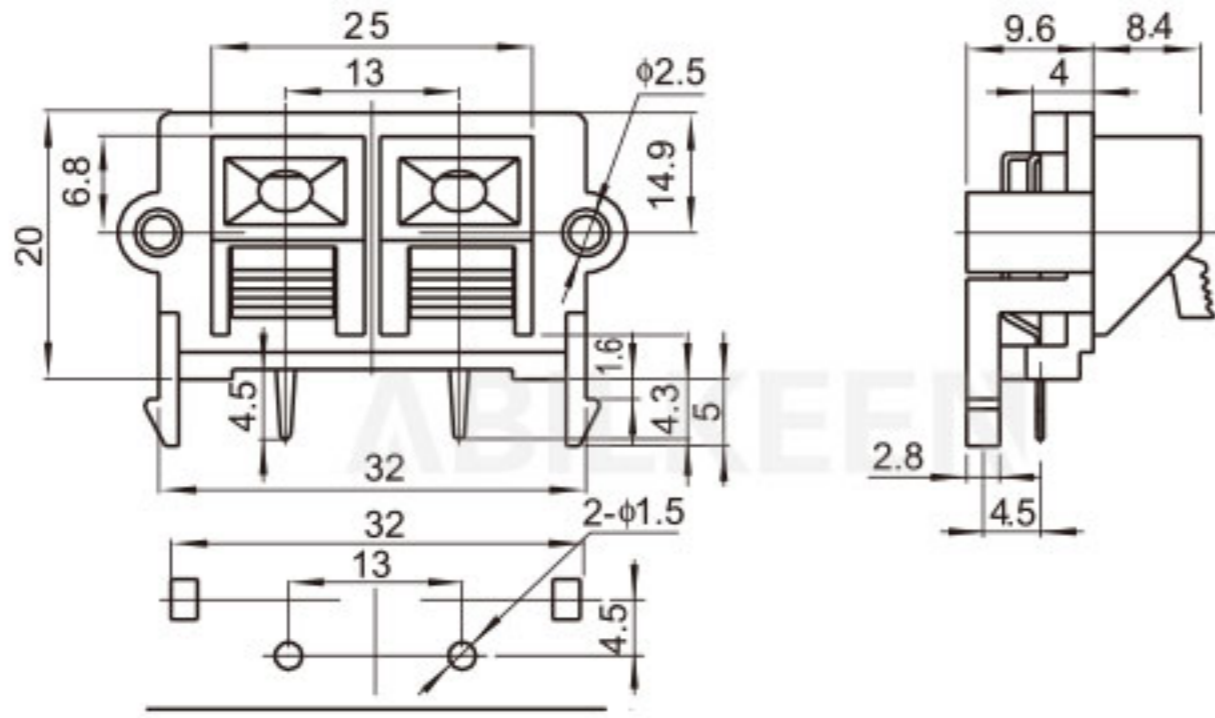



WP-023

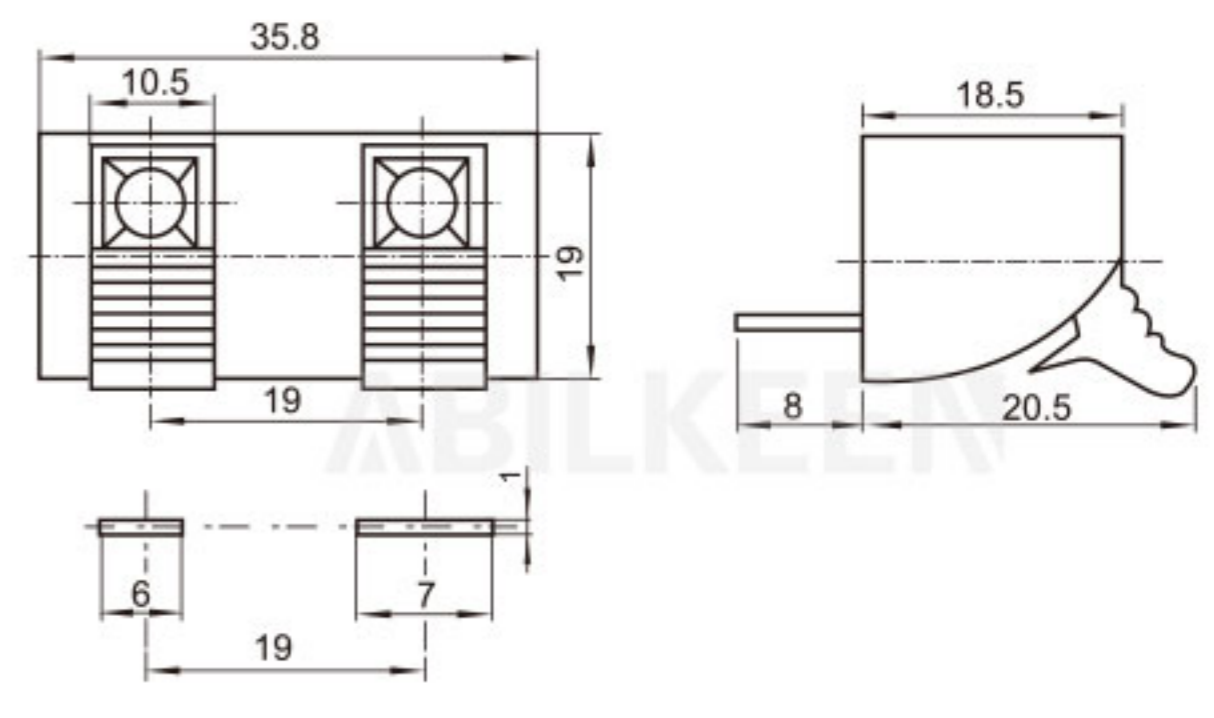



WP-033

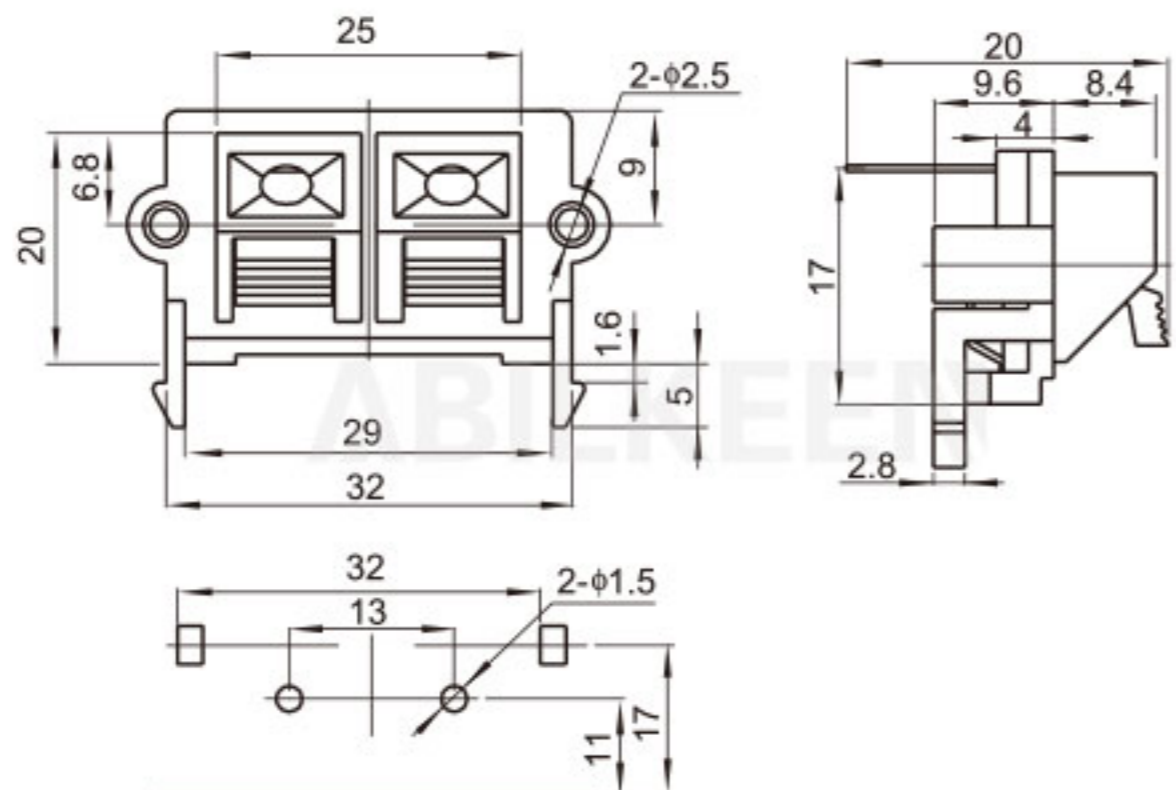



WP-024

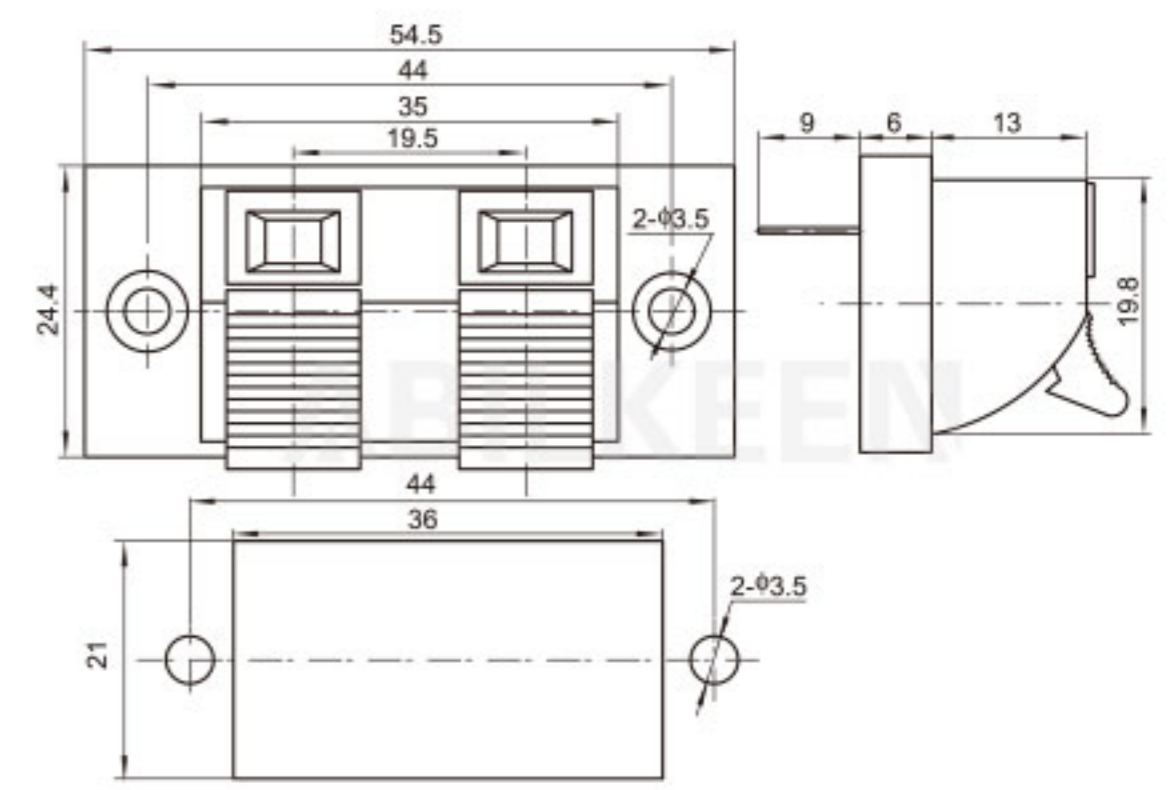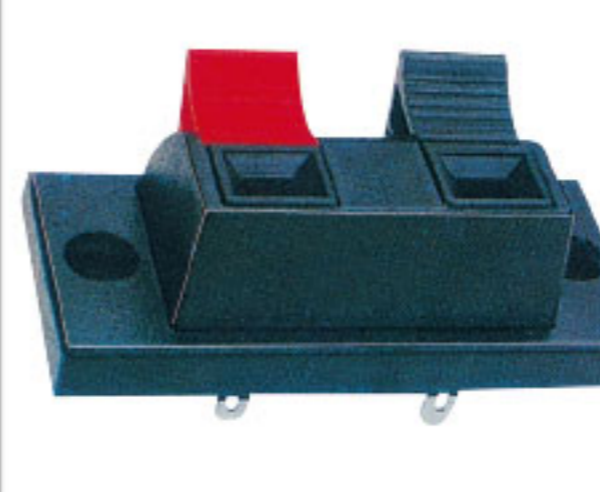



WP-035

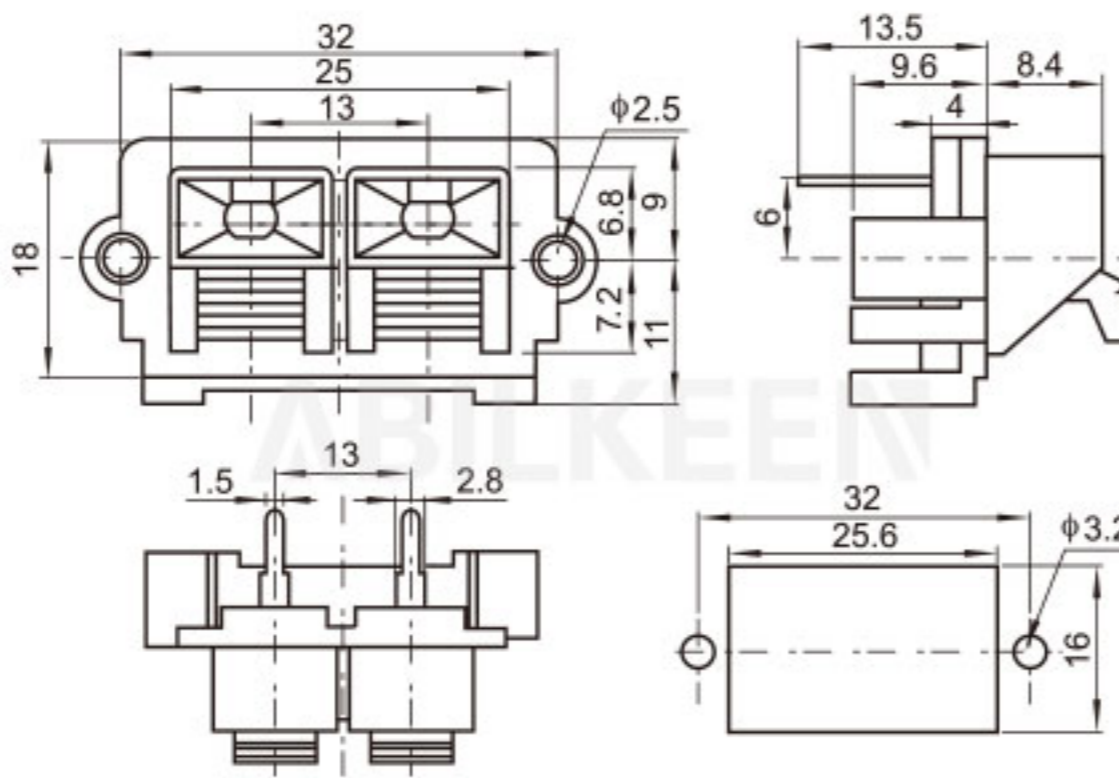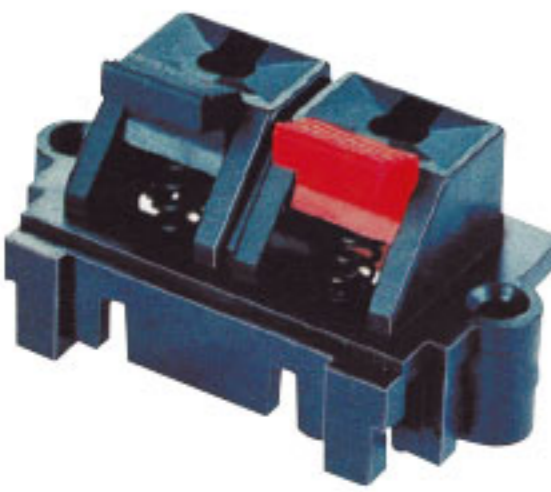



WP-025

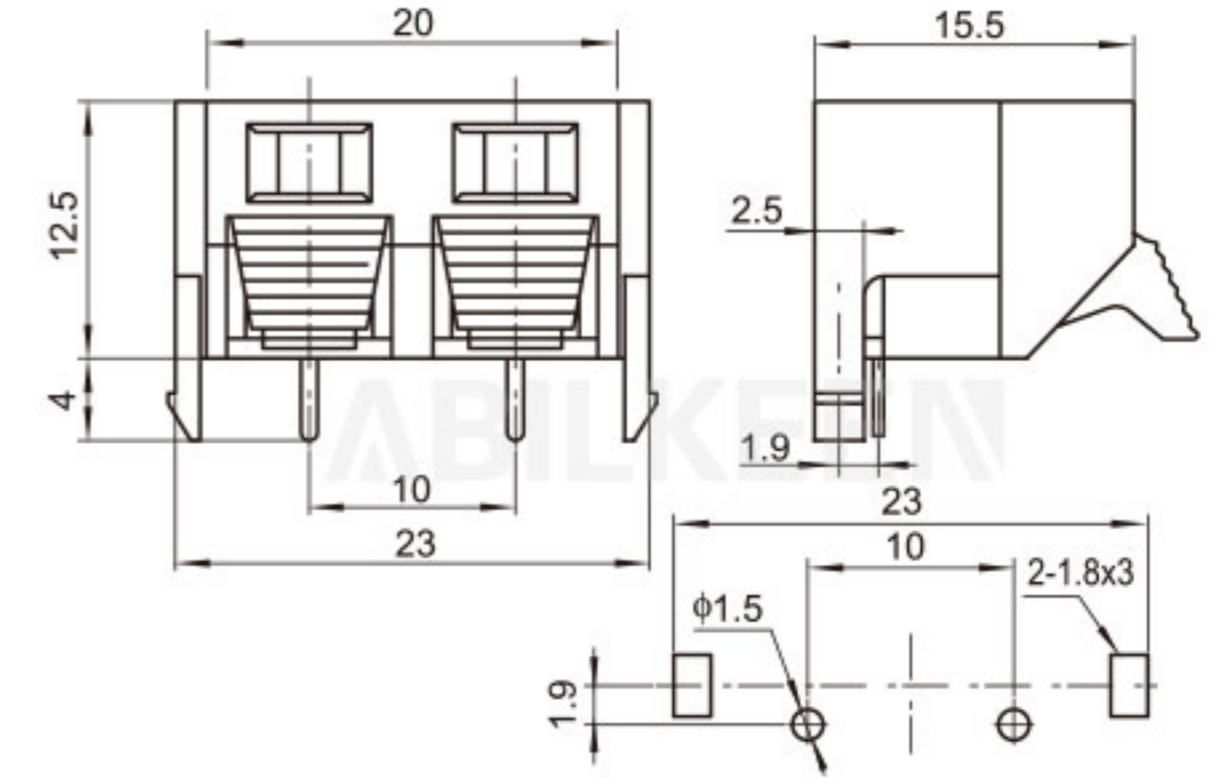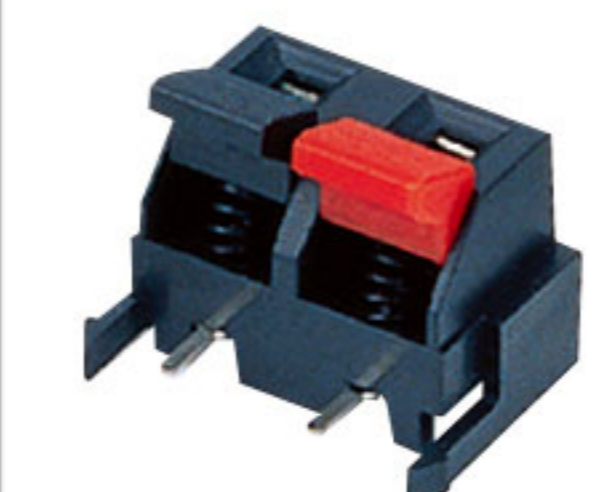


WP-037

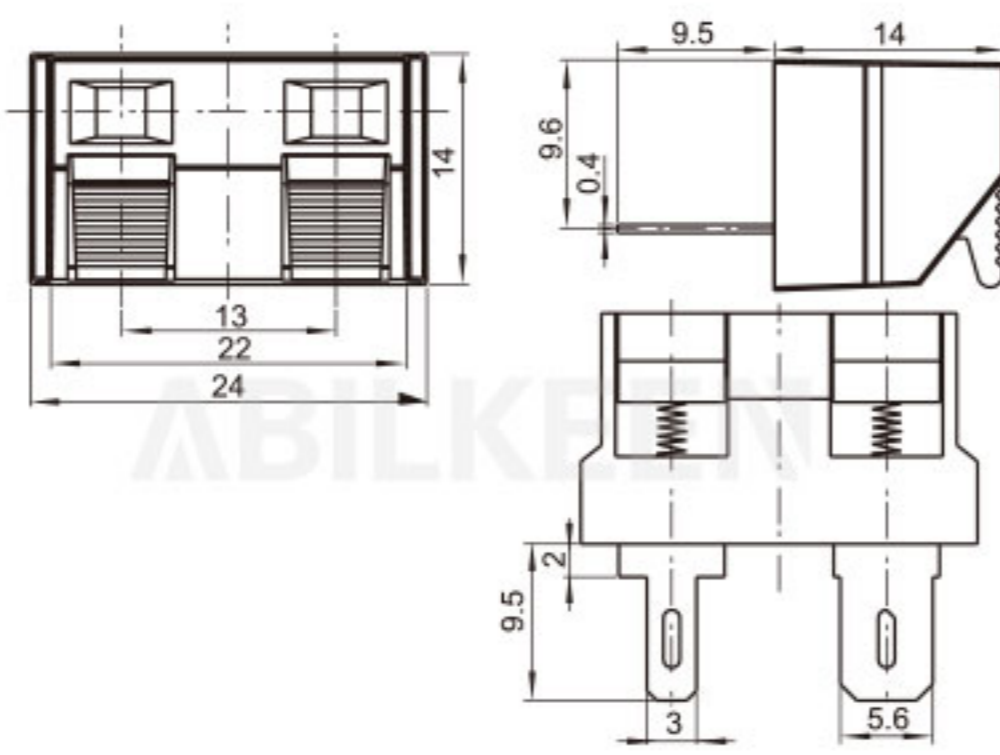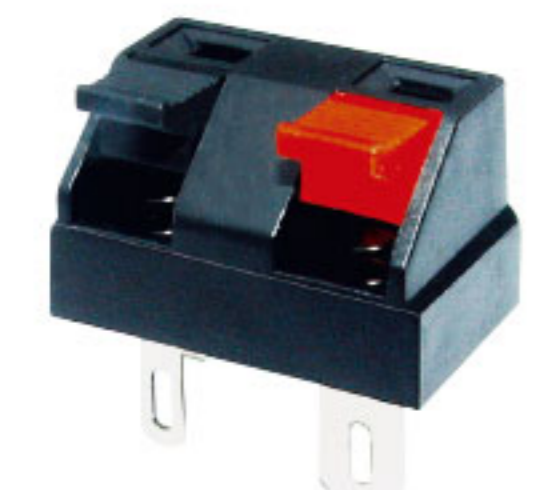


WP-029

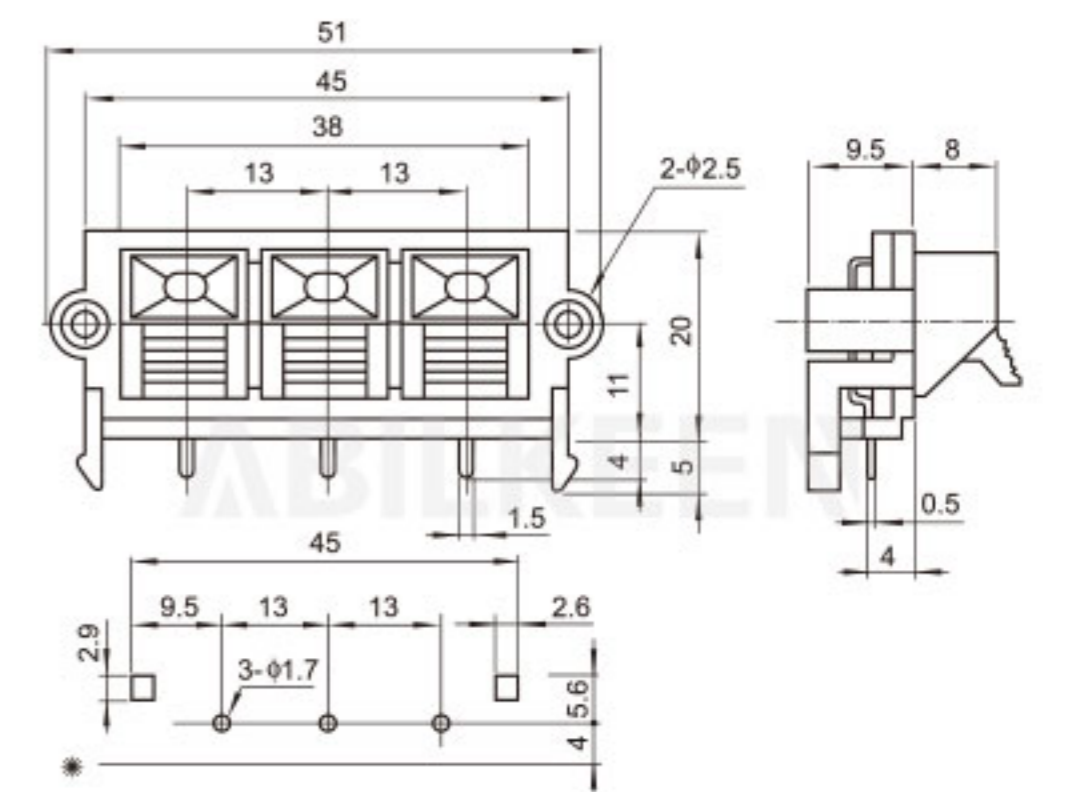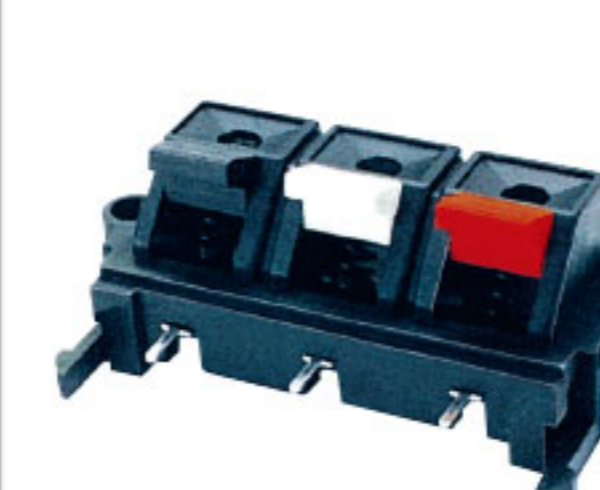


WP-042

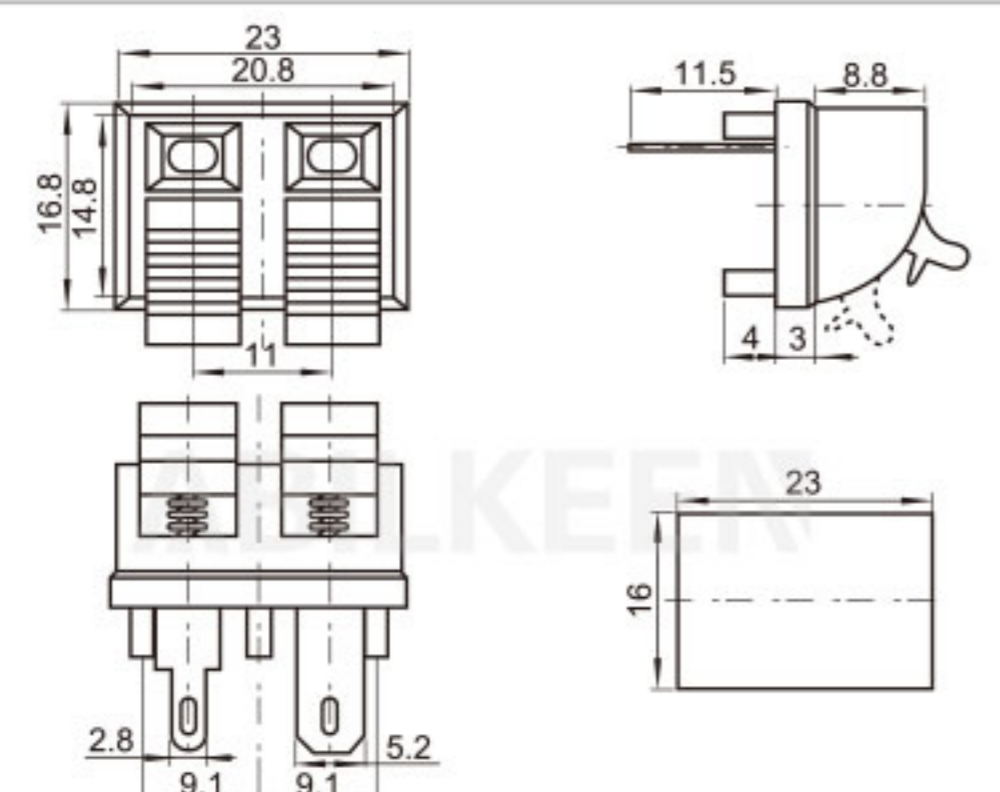


WP-030

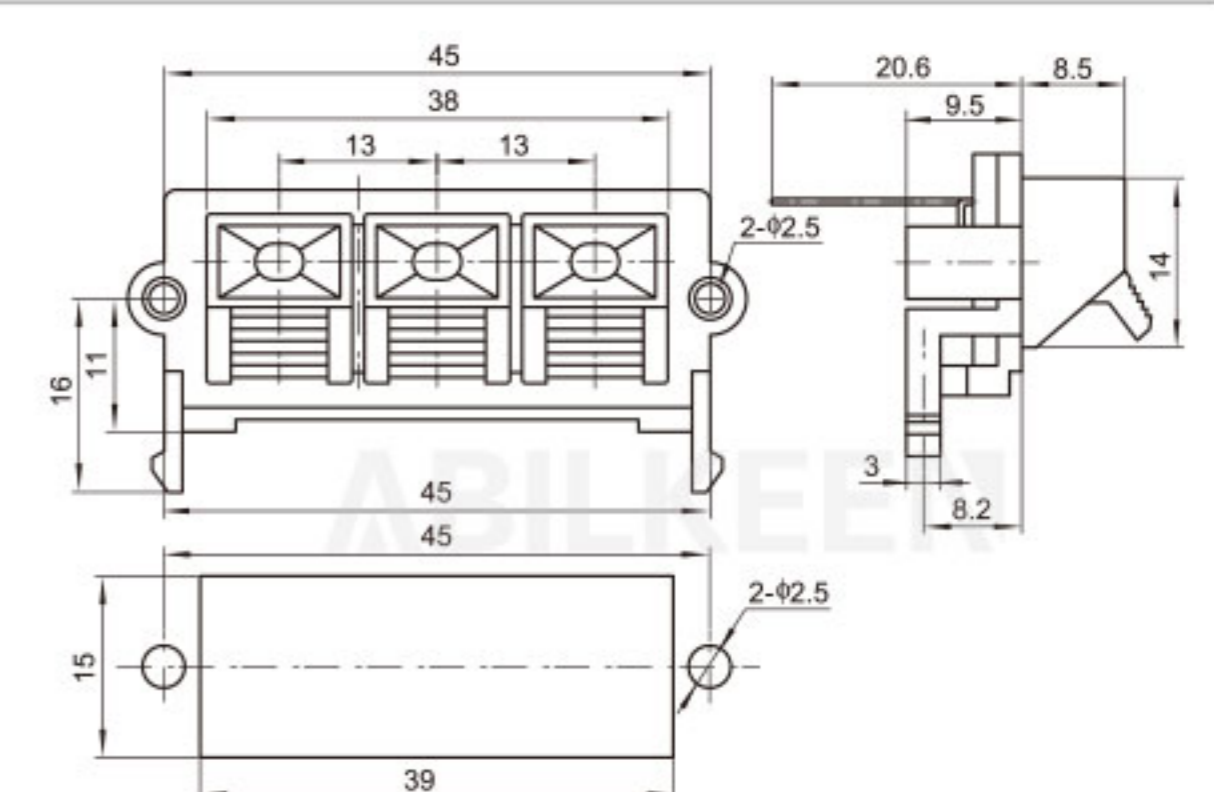


WP-043

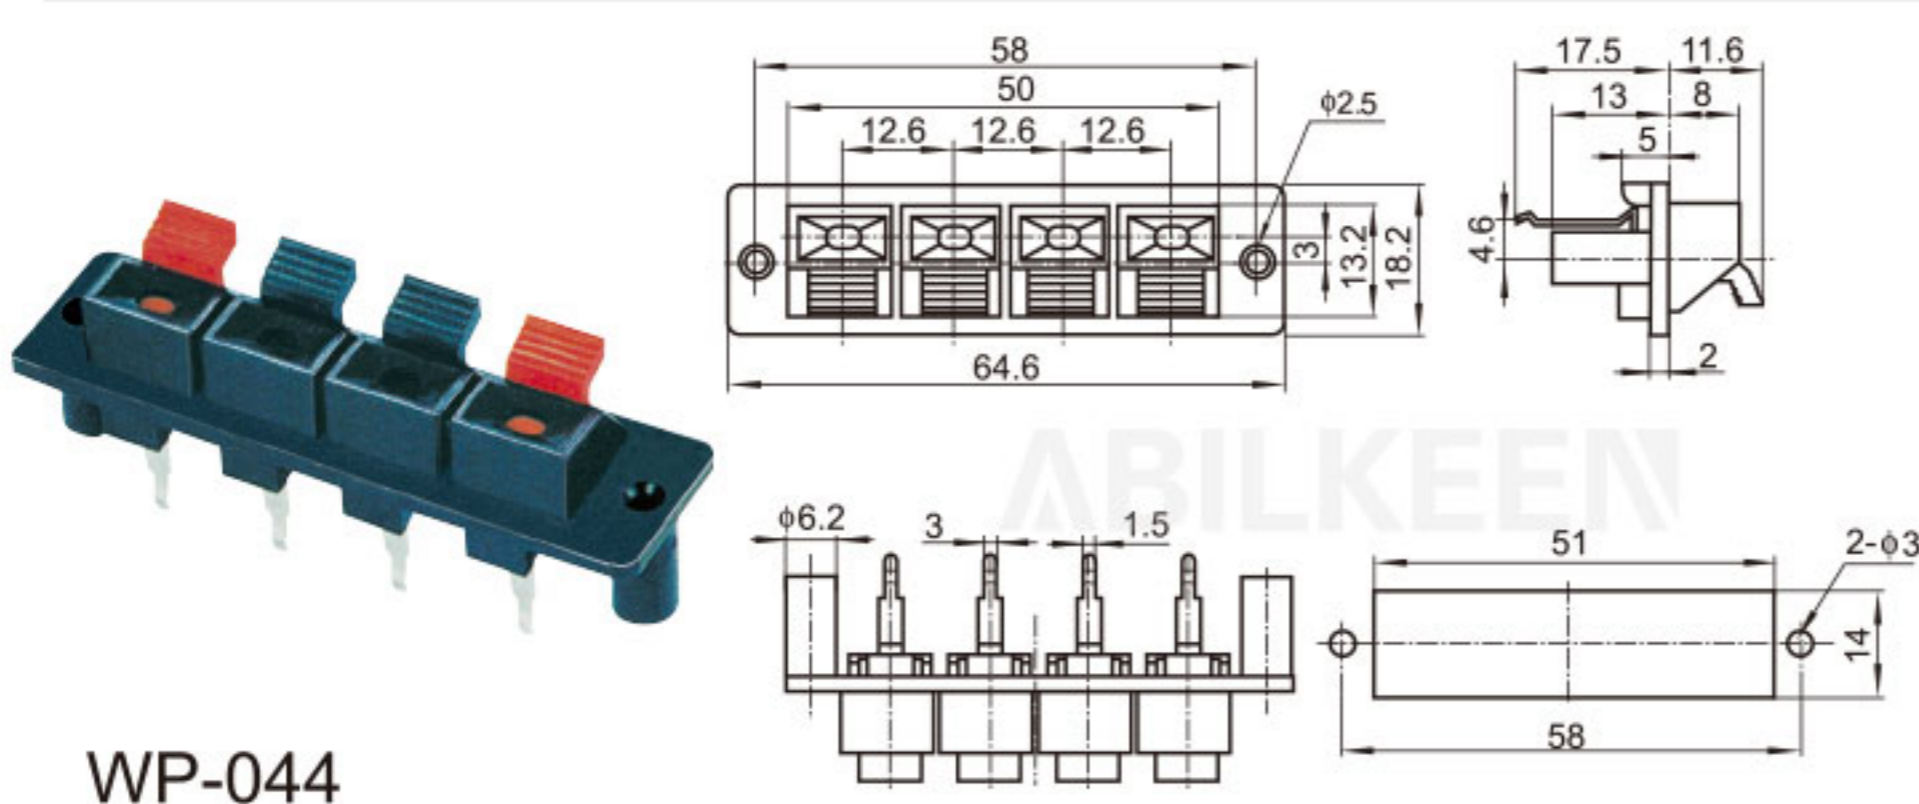


WP-044

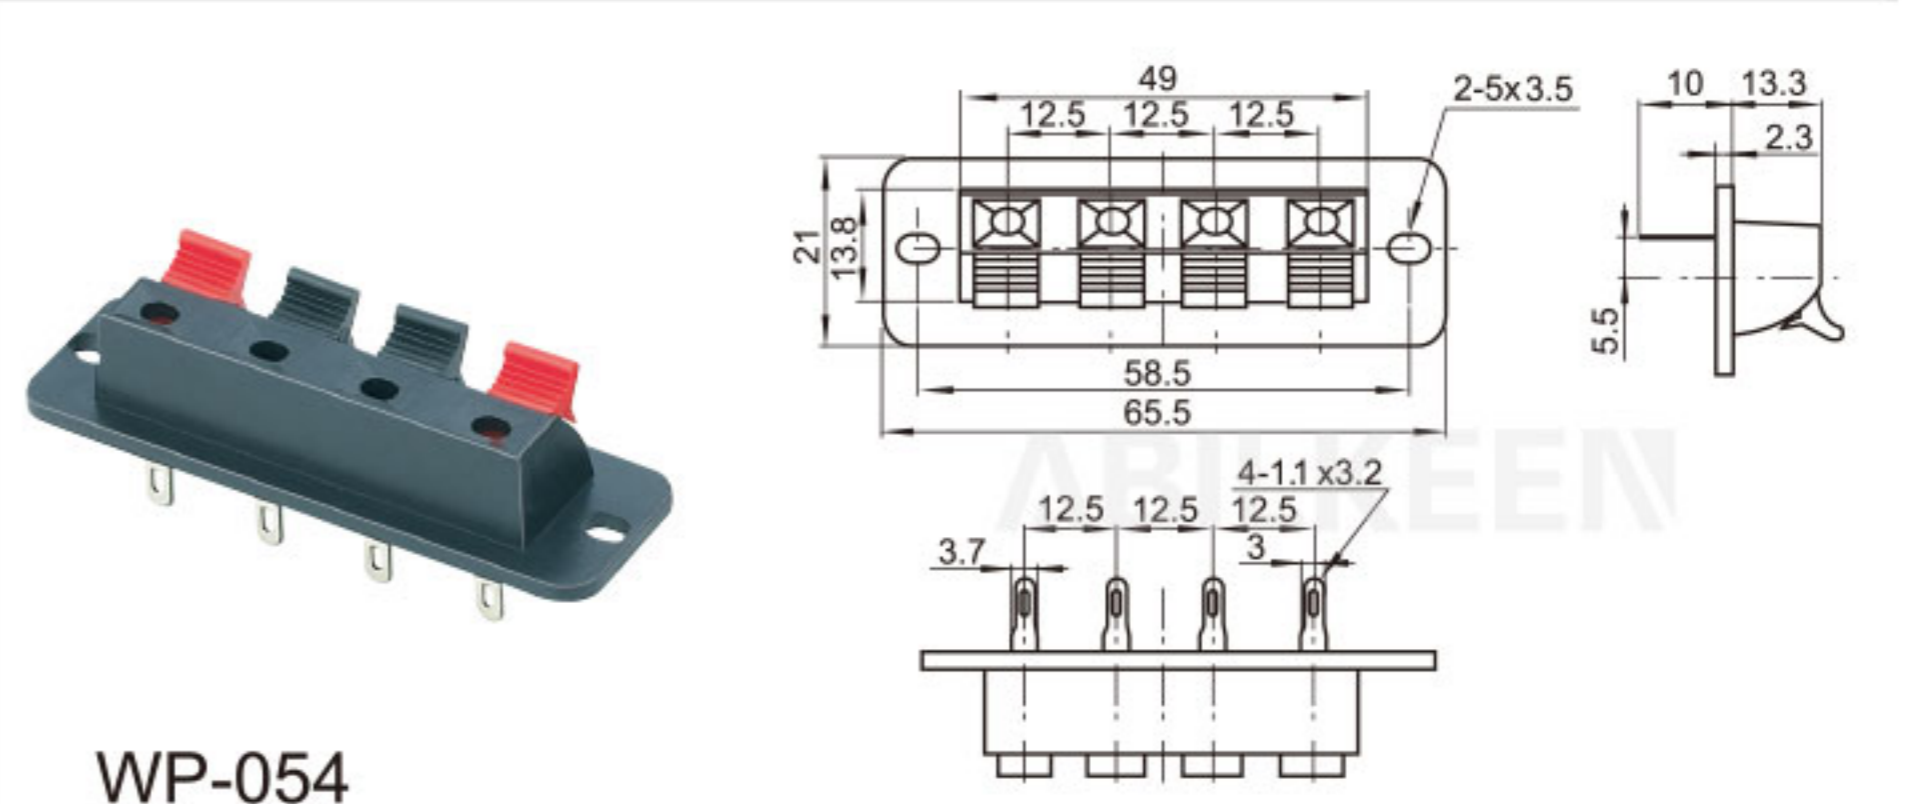


WP-054

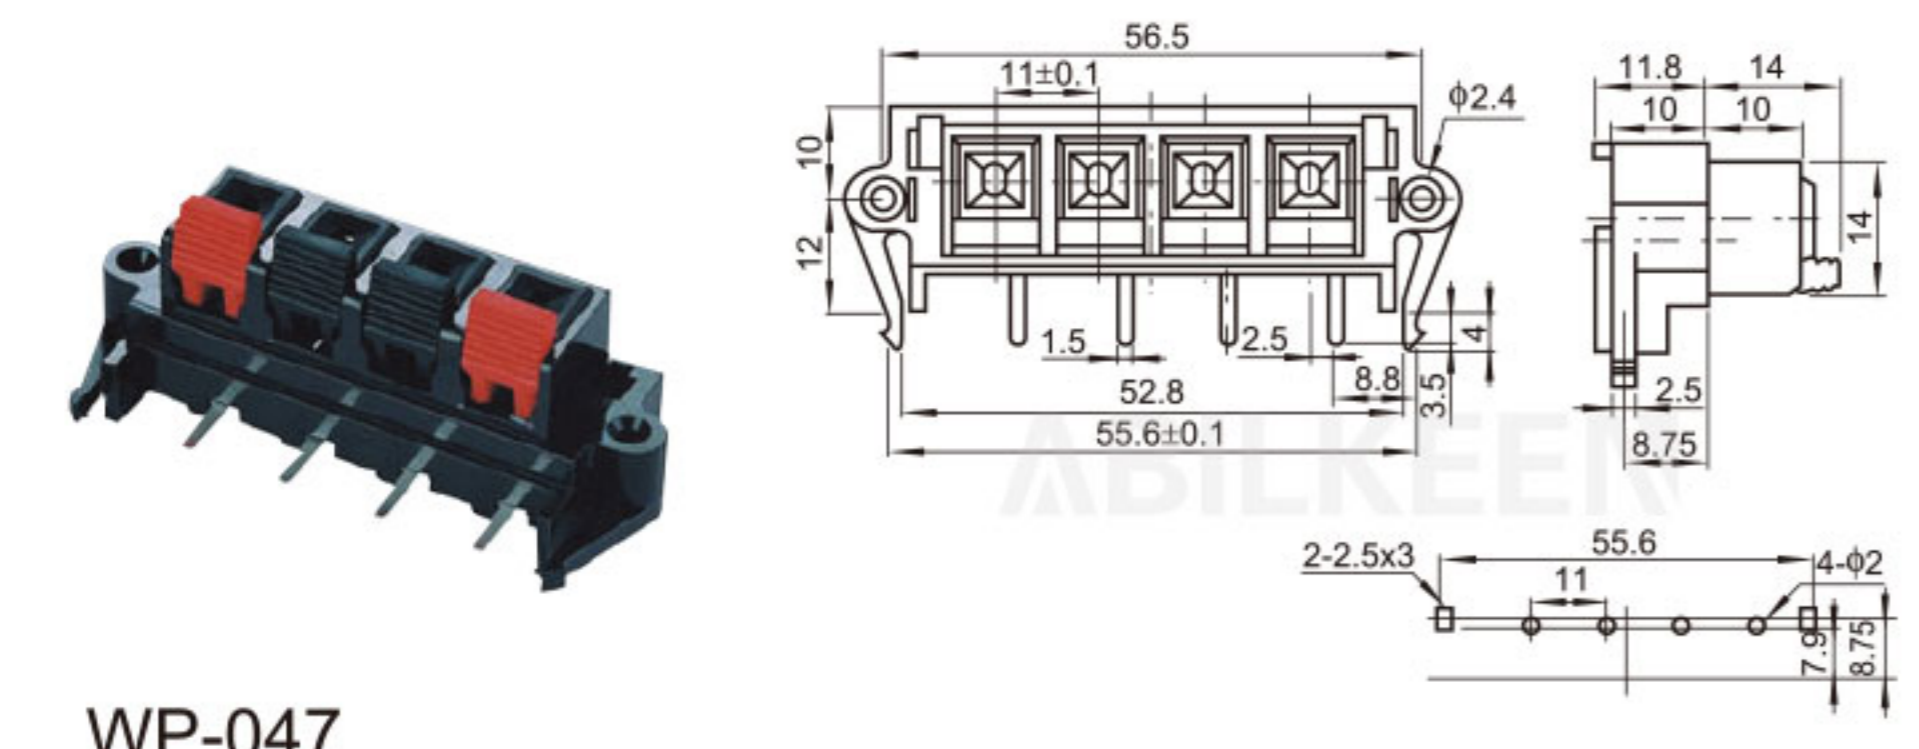


WP-047

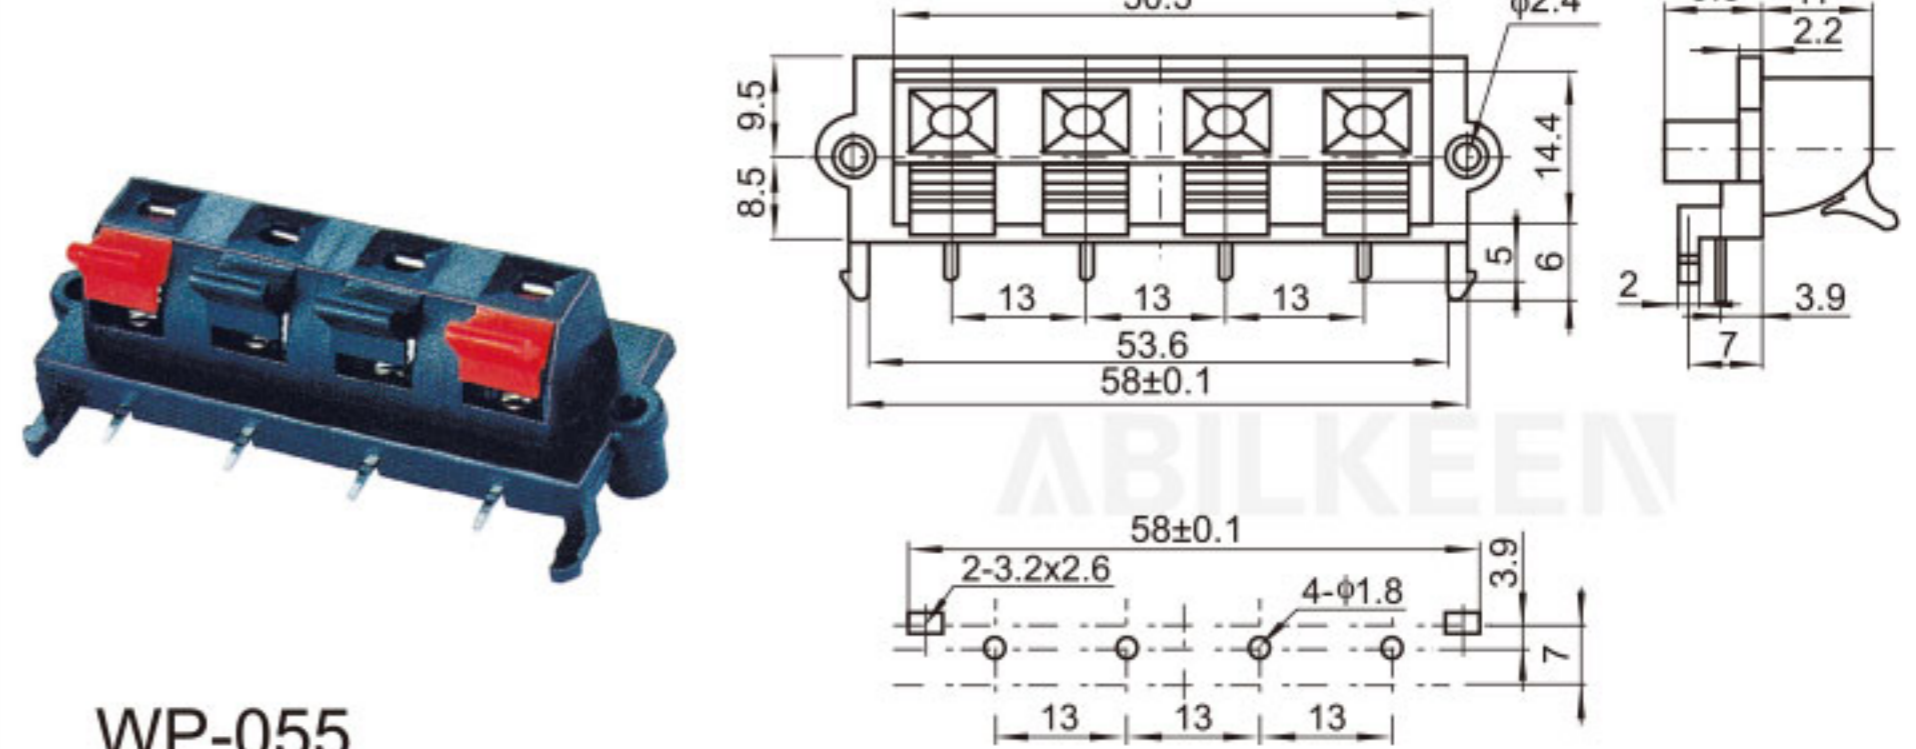


WP-055

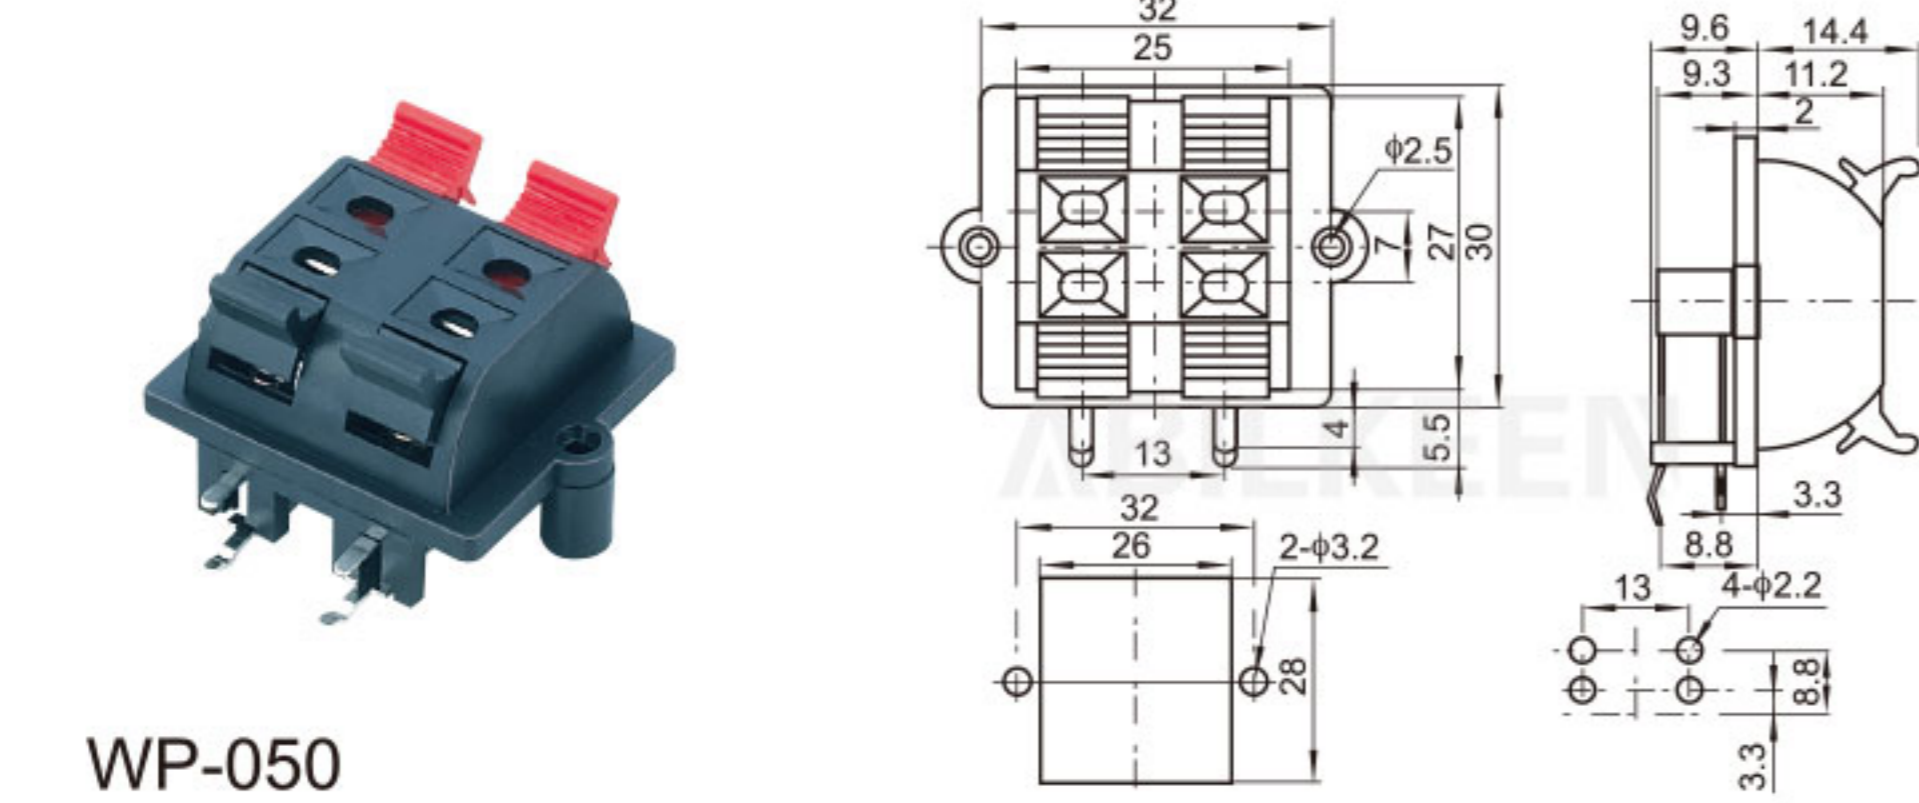


WP-050

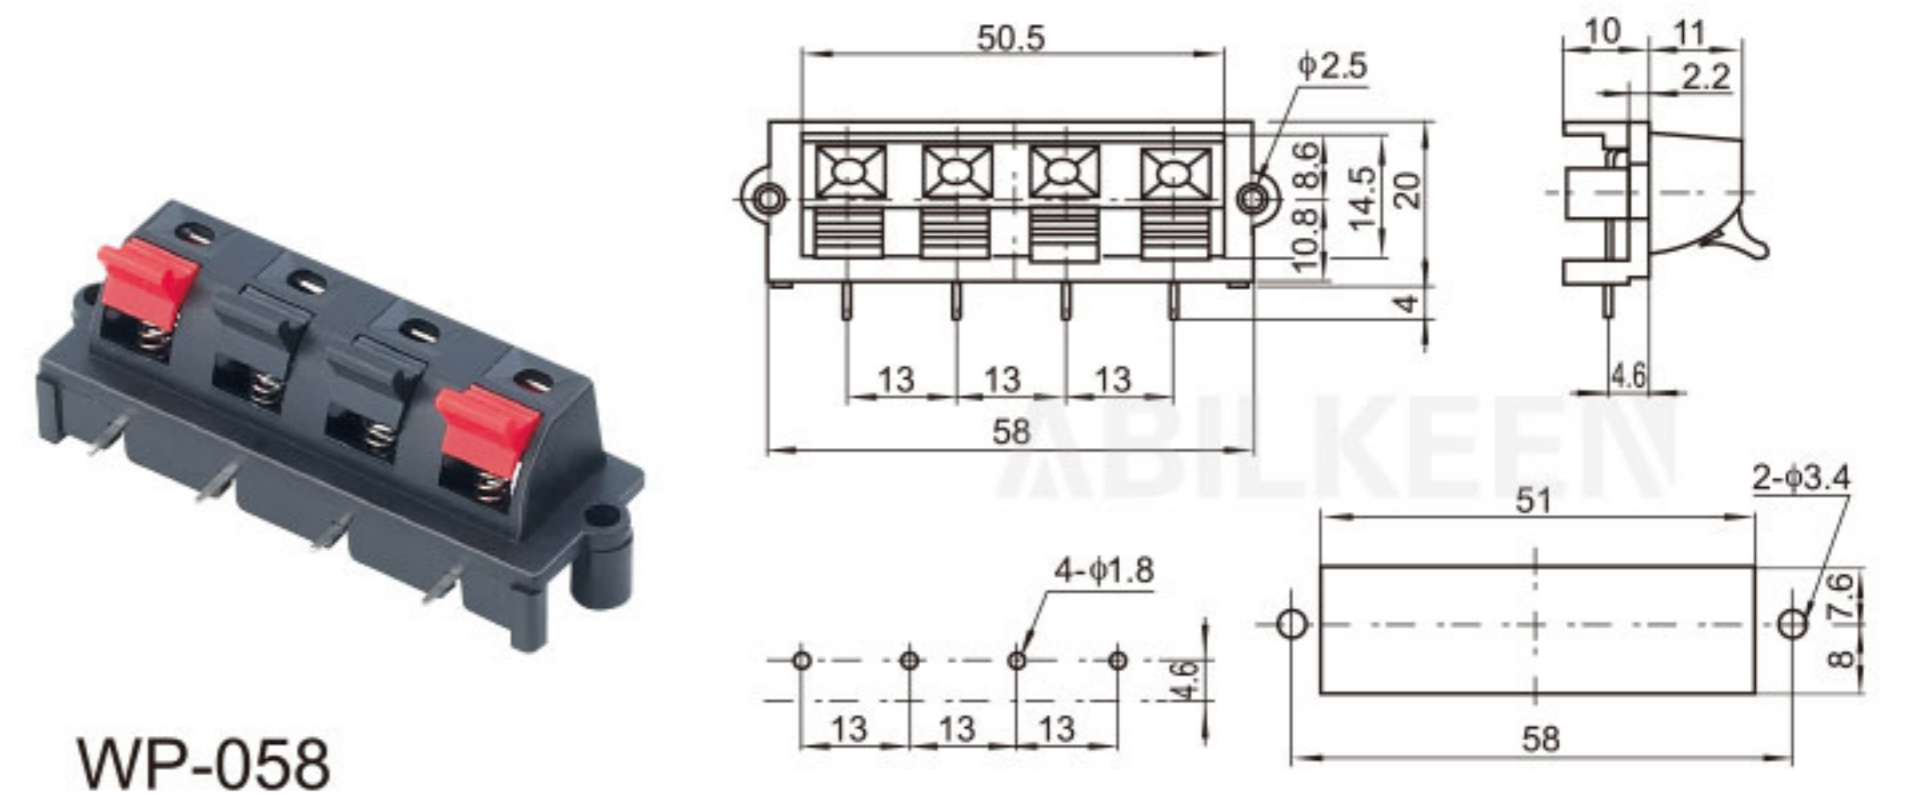


WP-058

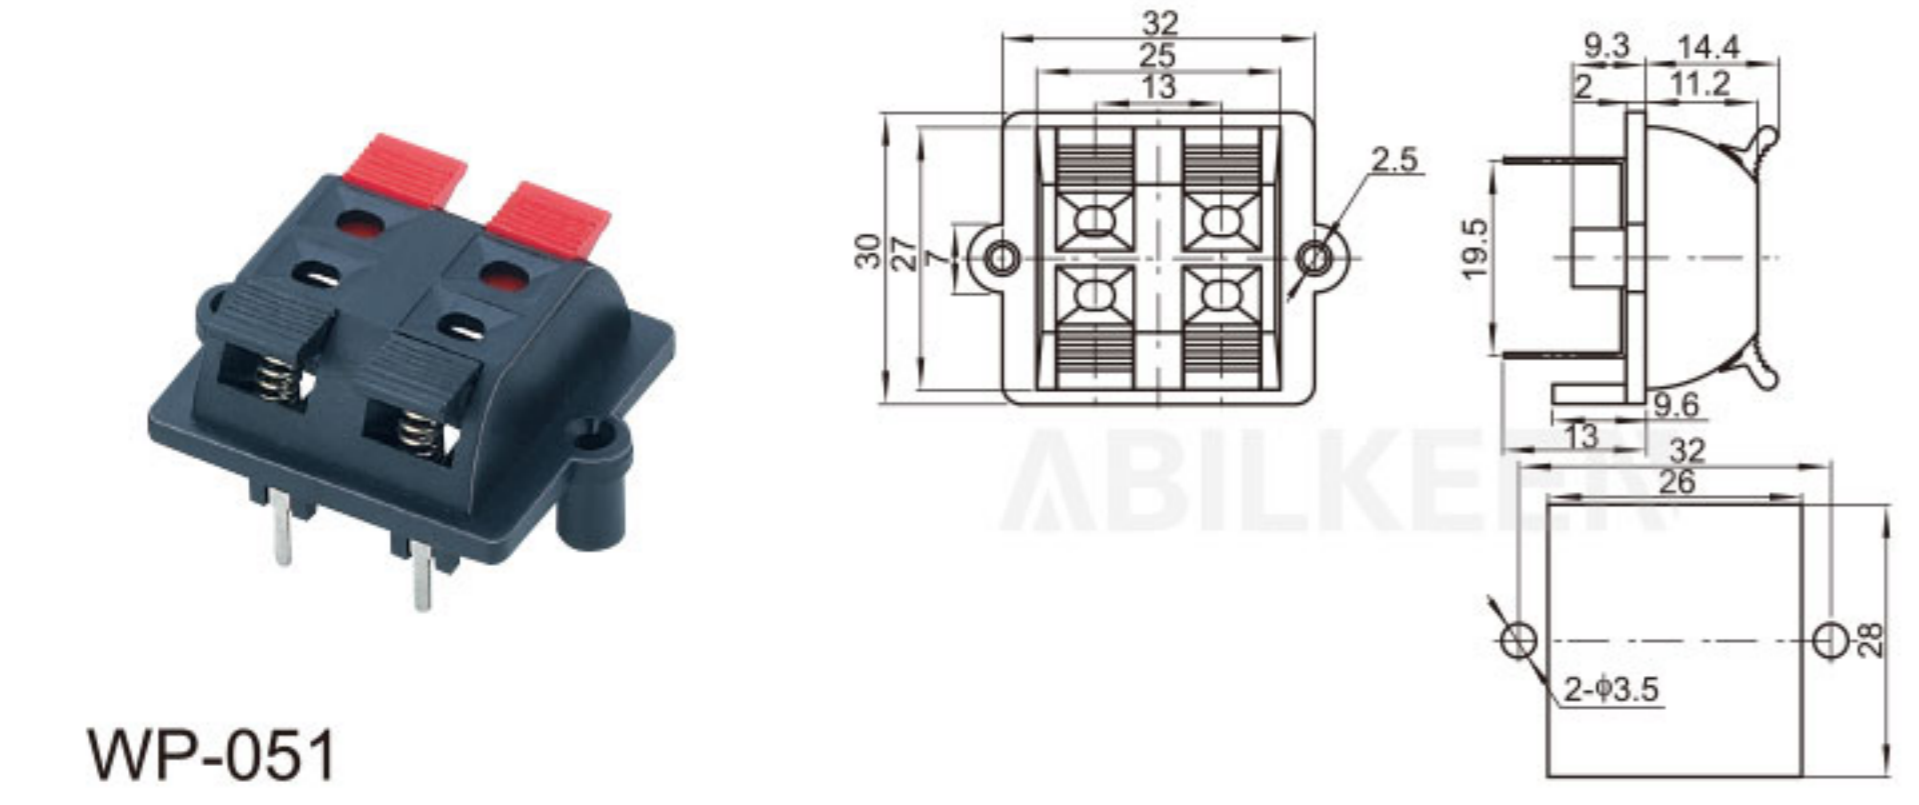


WP-051

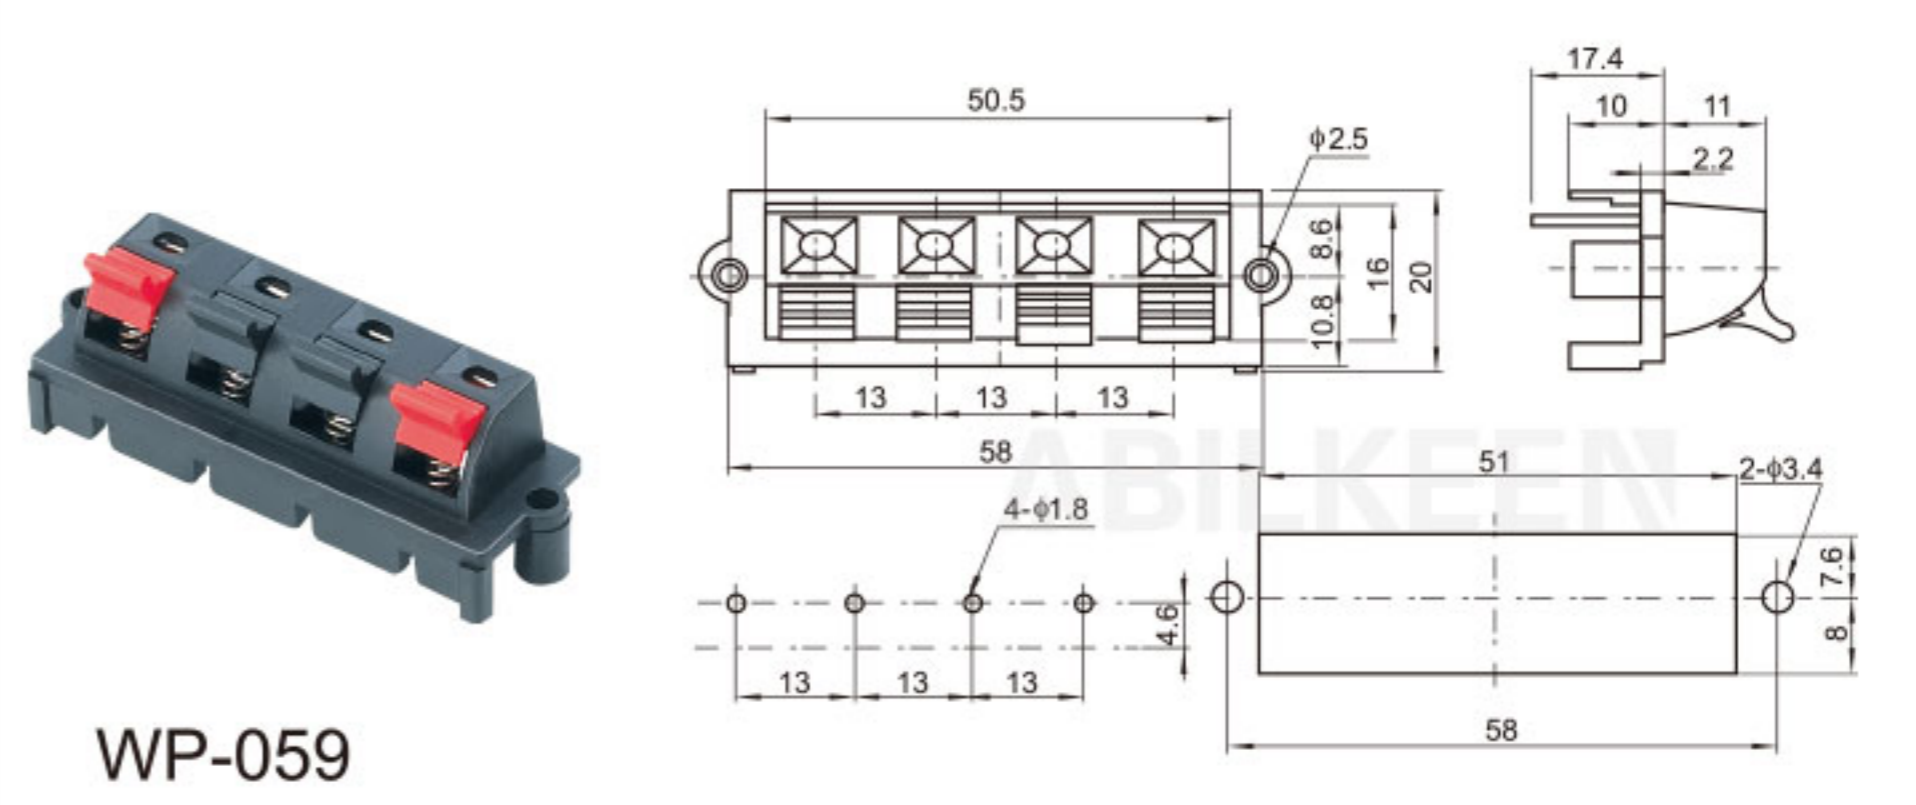


WP-059

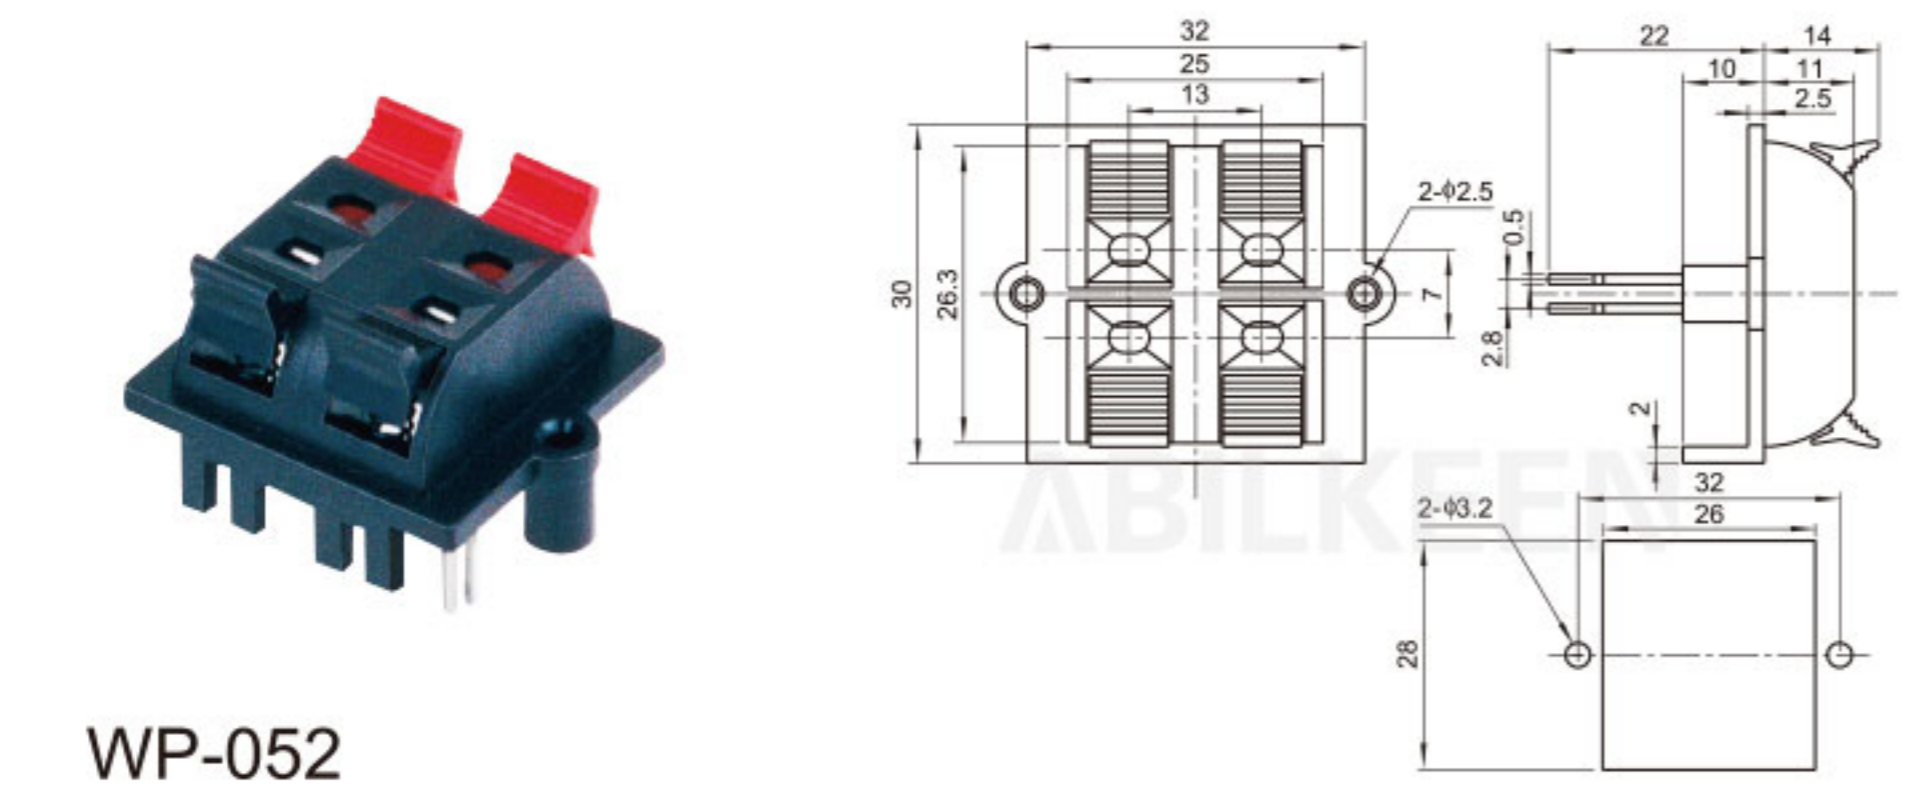


WP-052

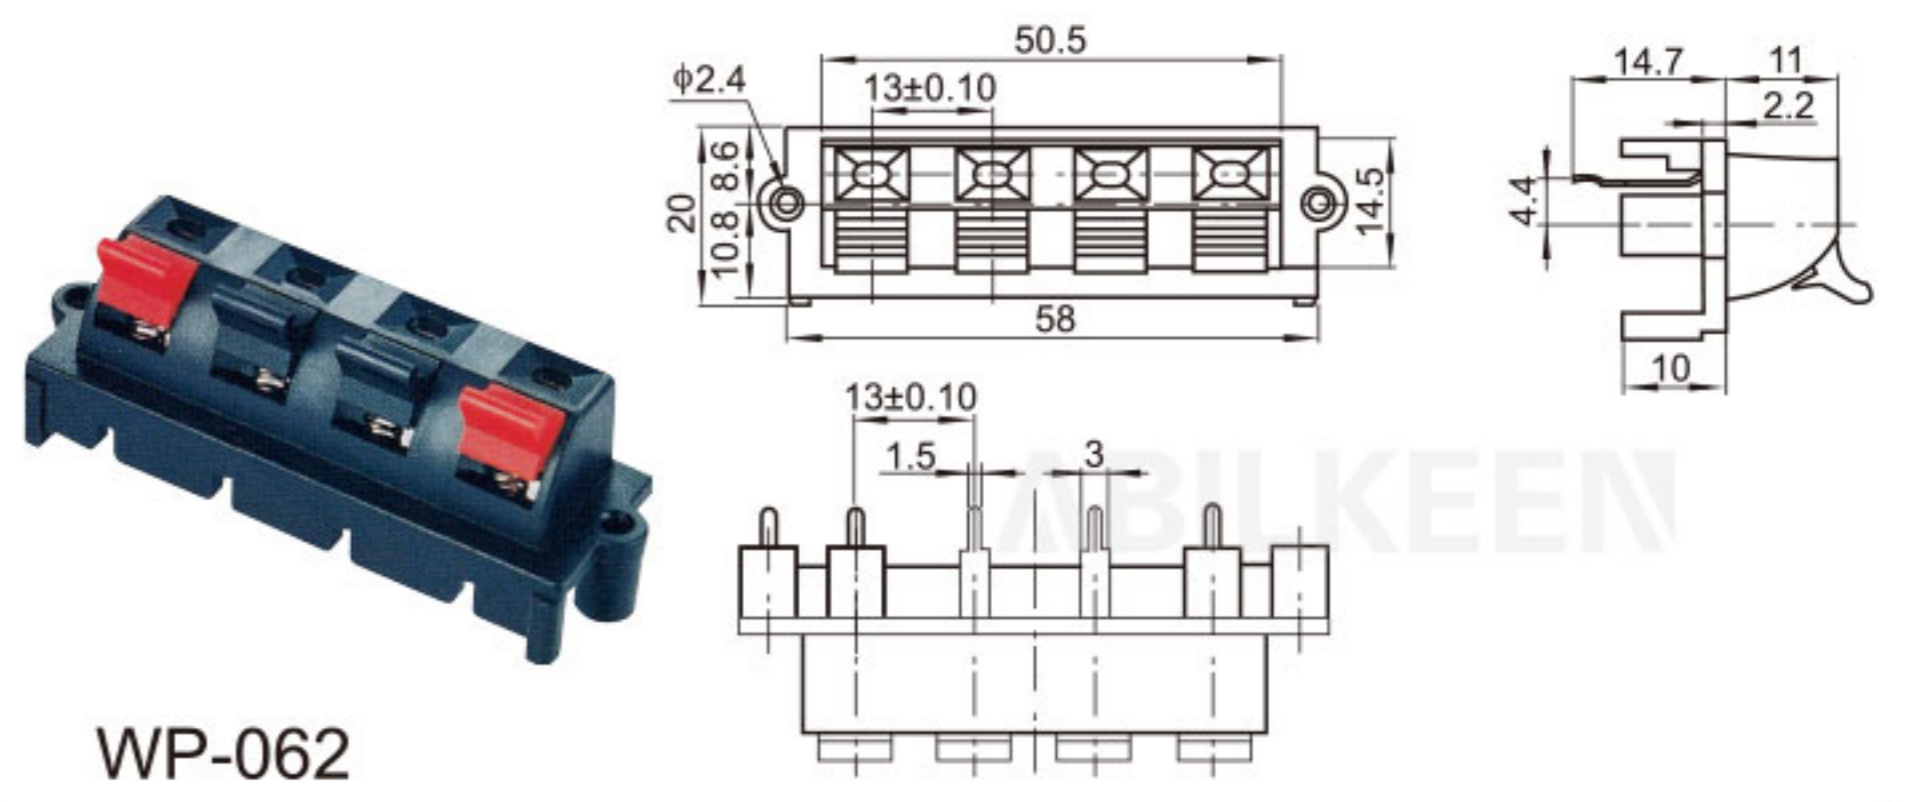

WP-062

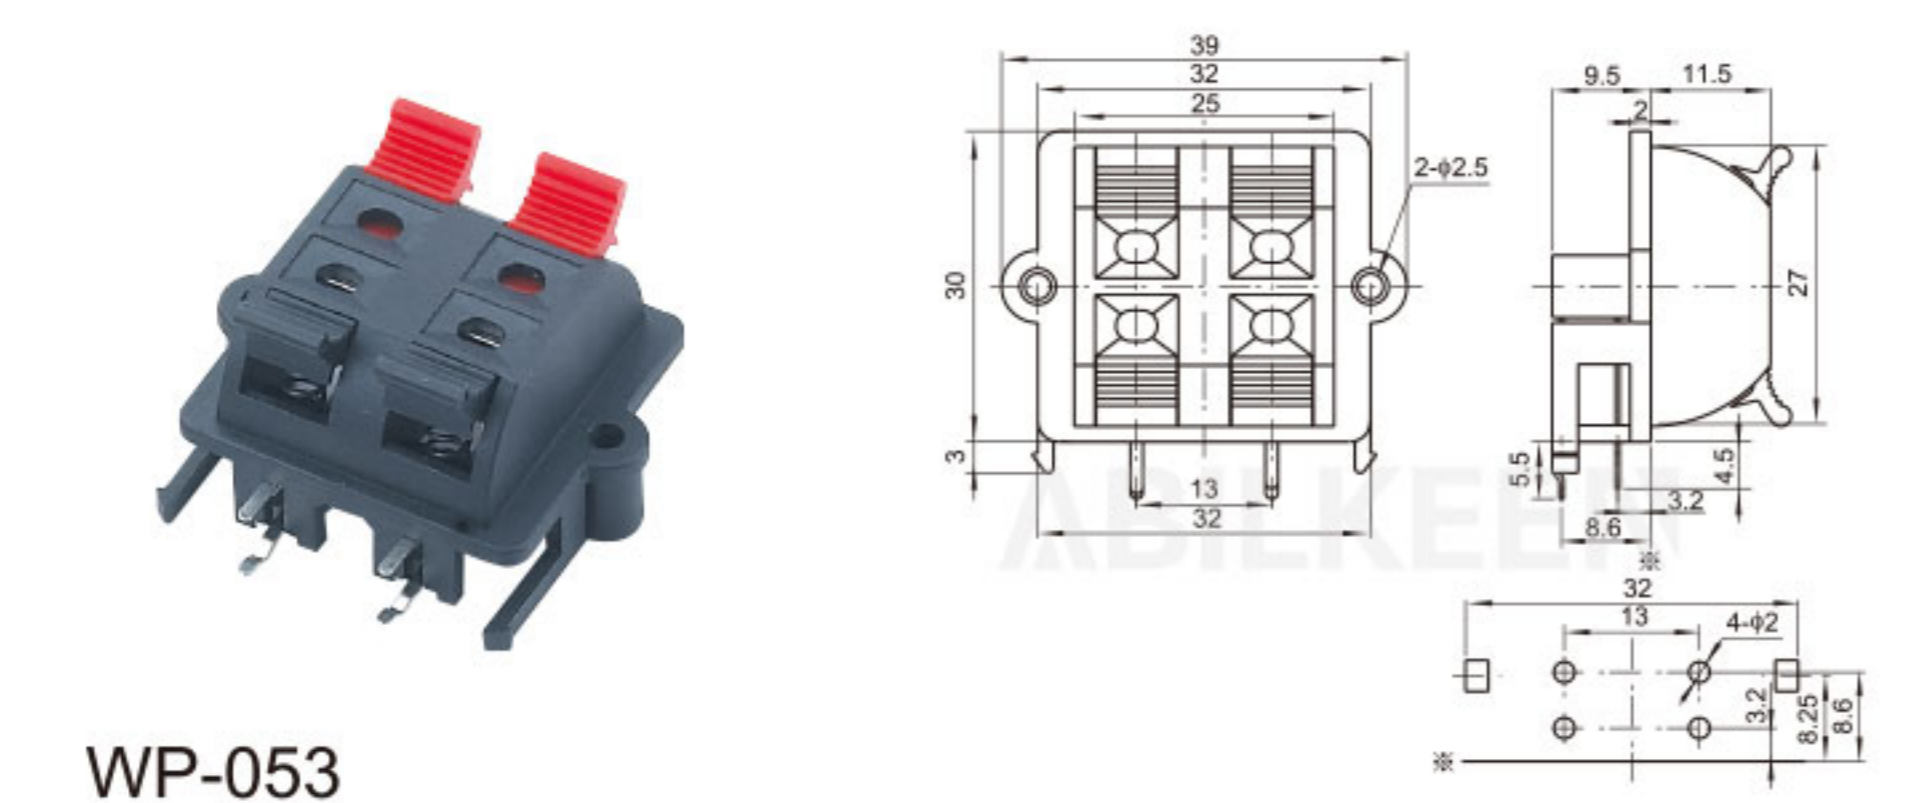



WP-053

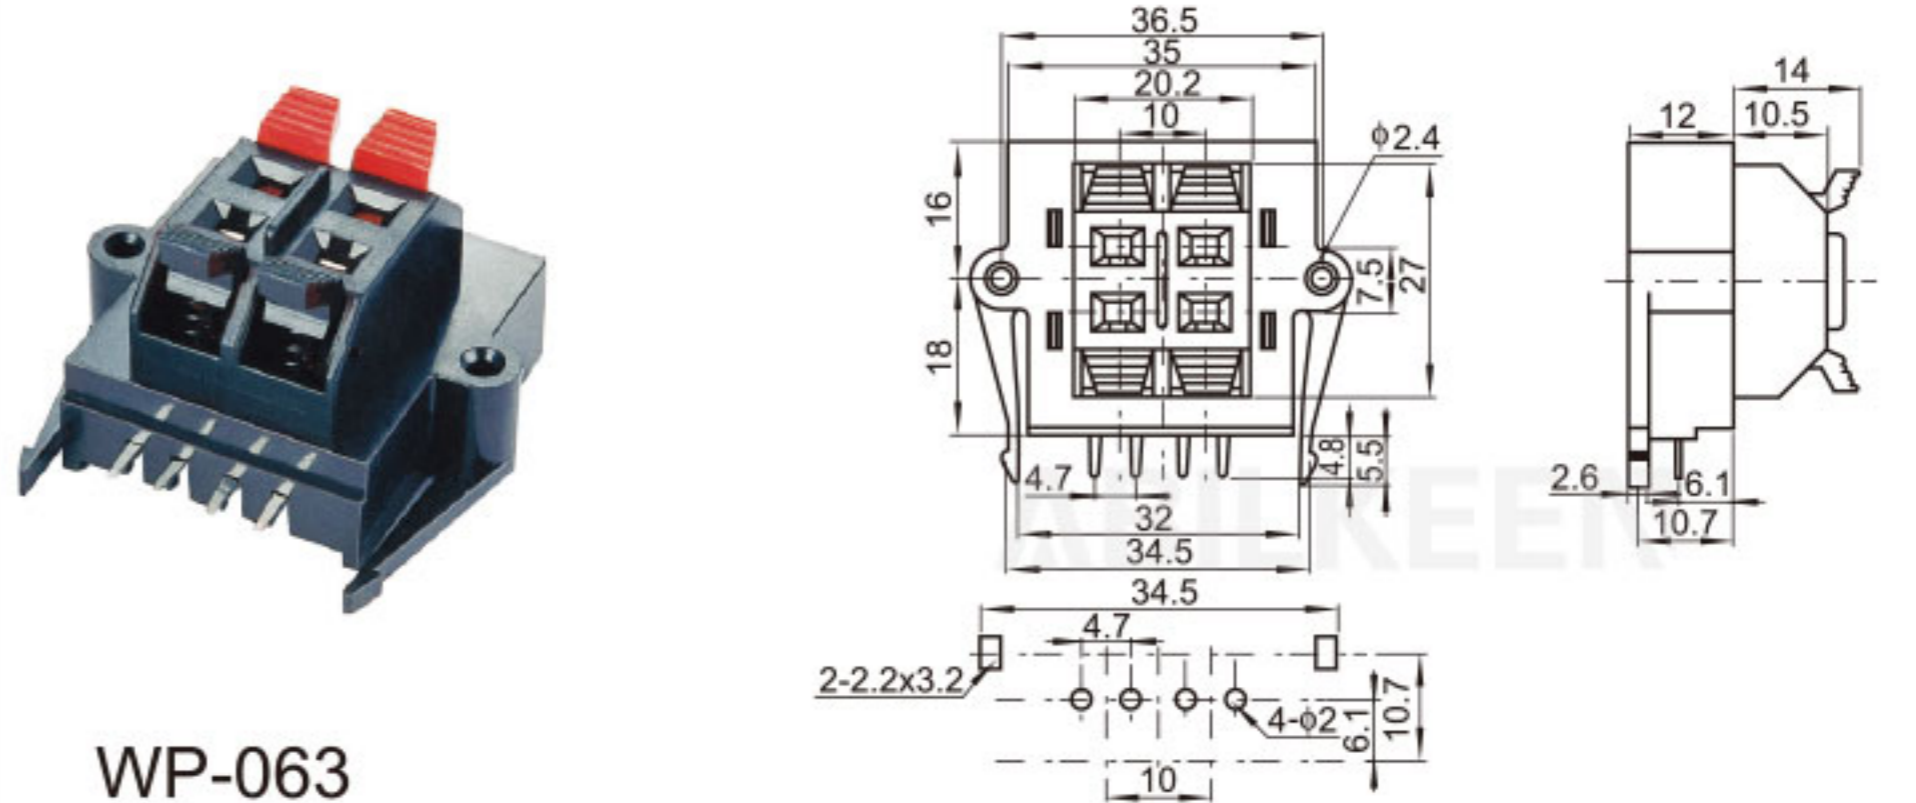


WP-063




WP-065

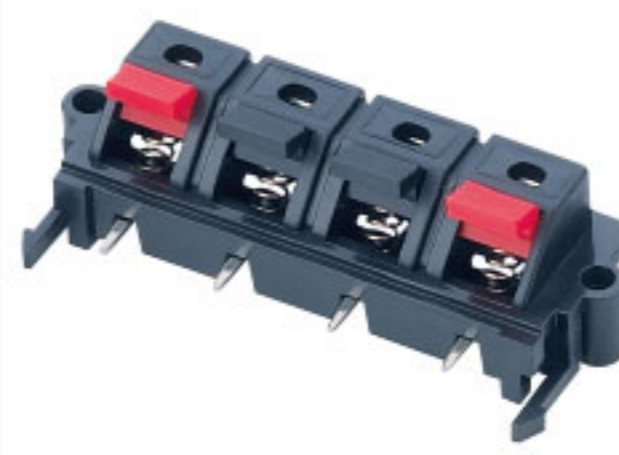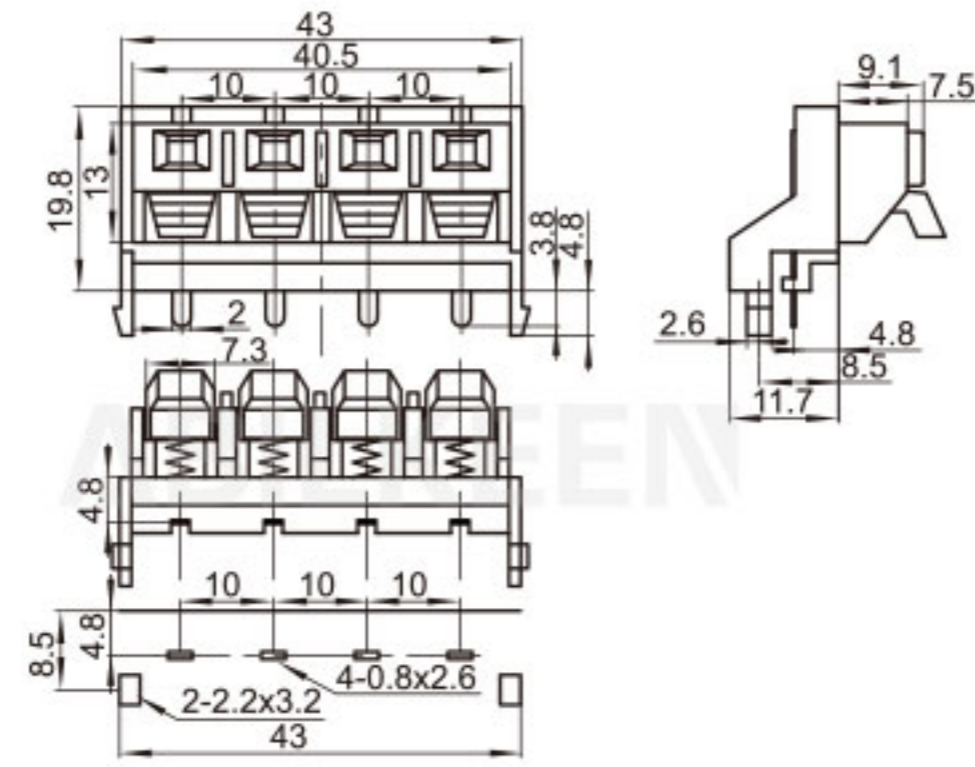


WP-075

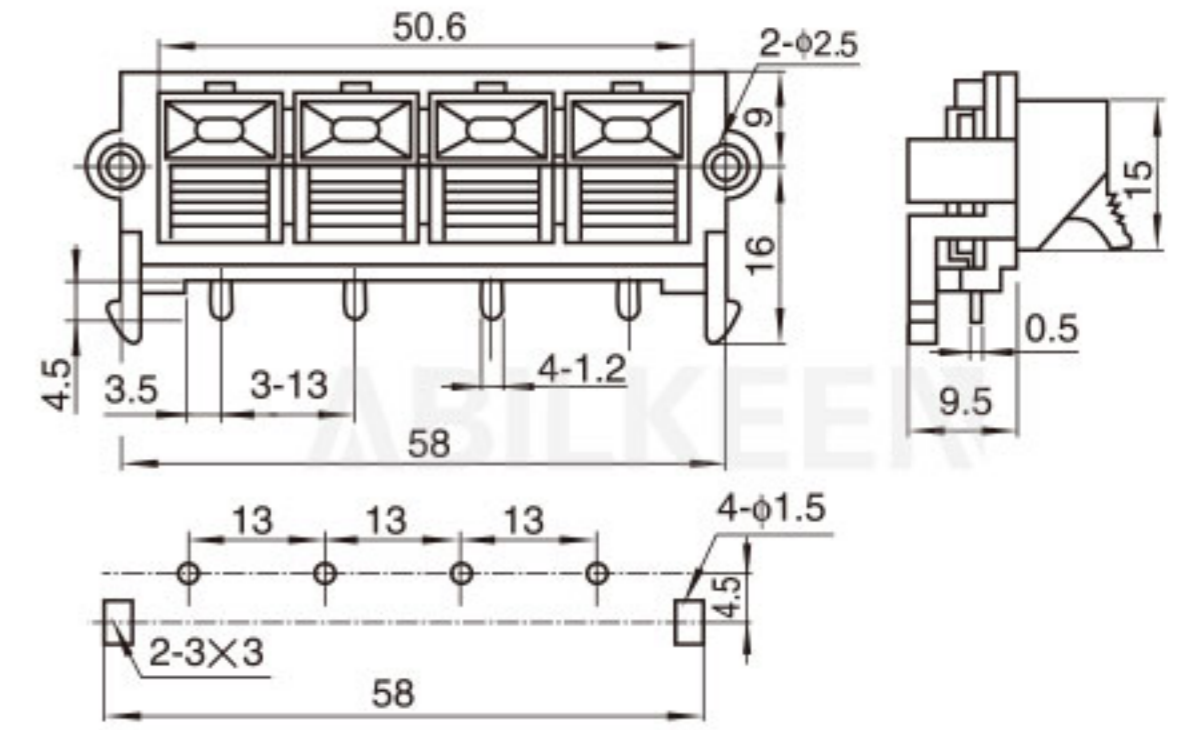



WP-066

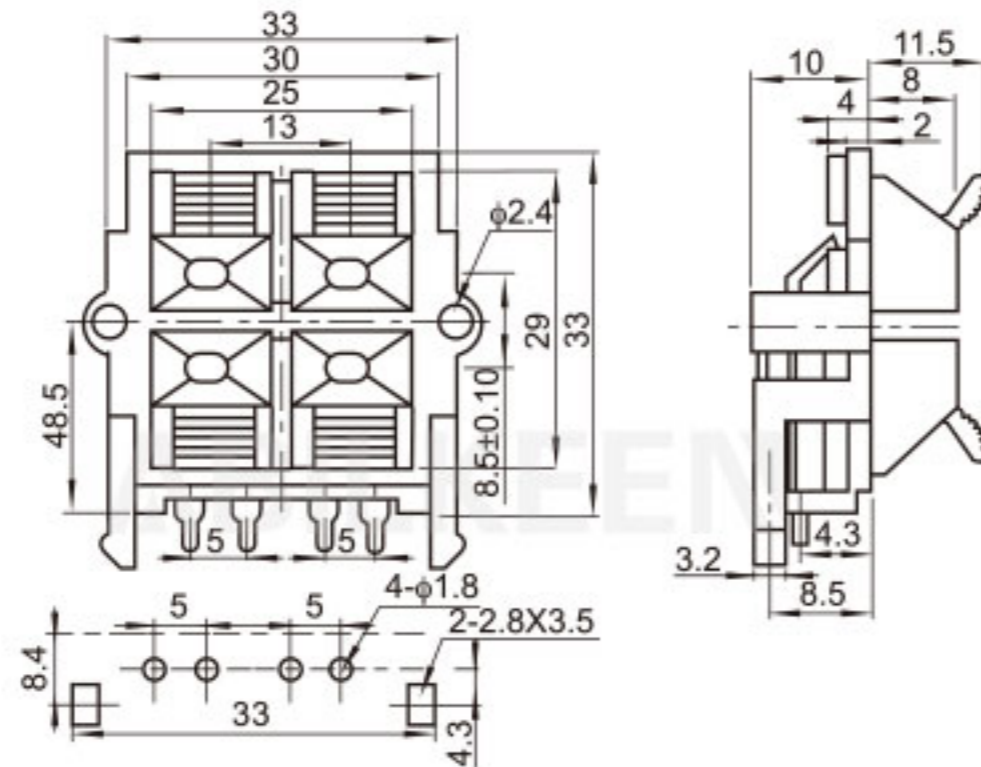


WP-076

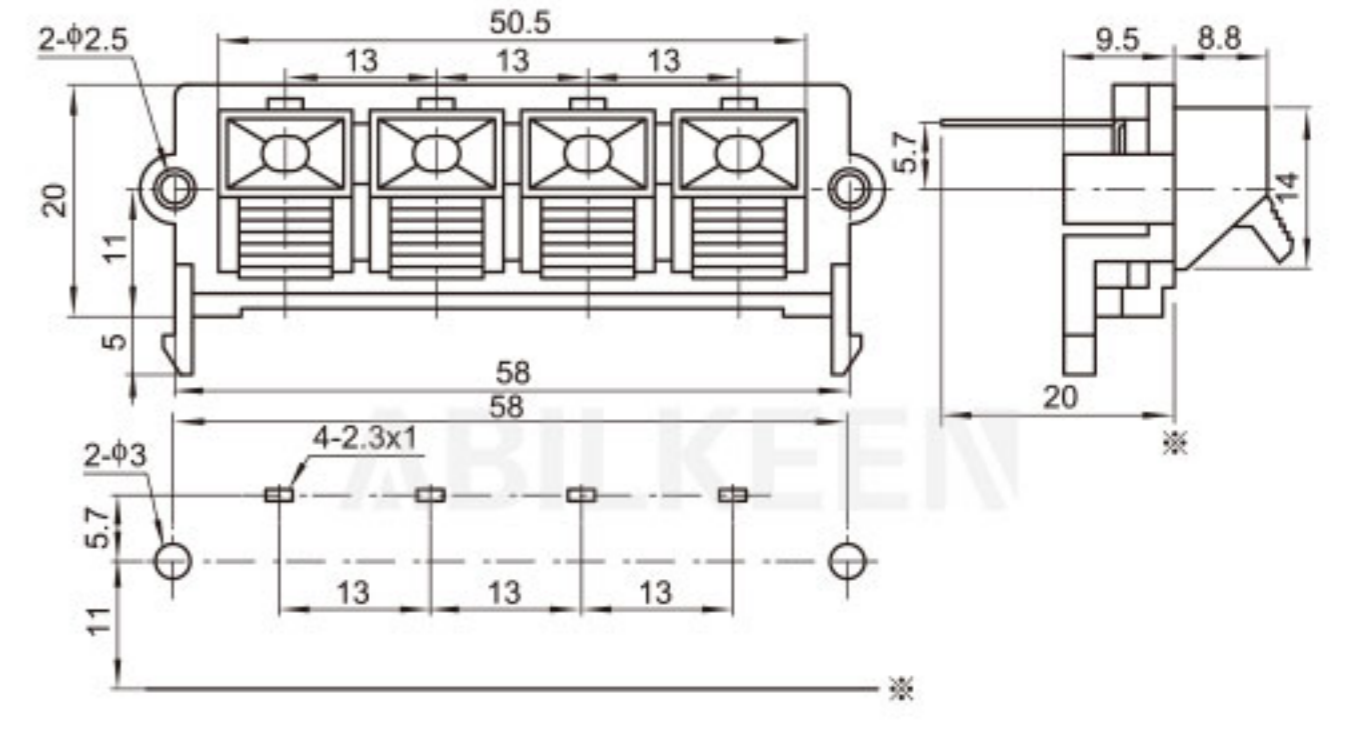



WP-067

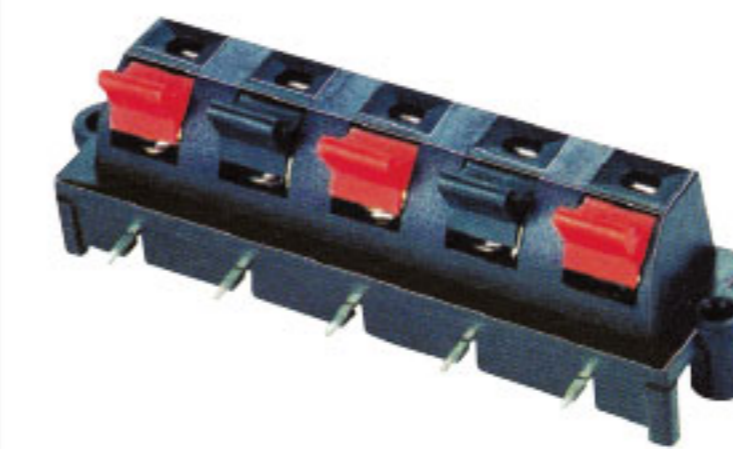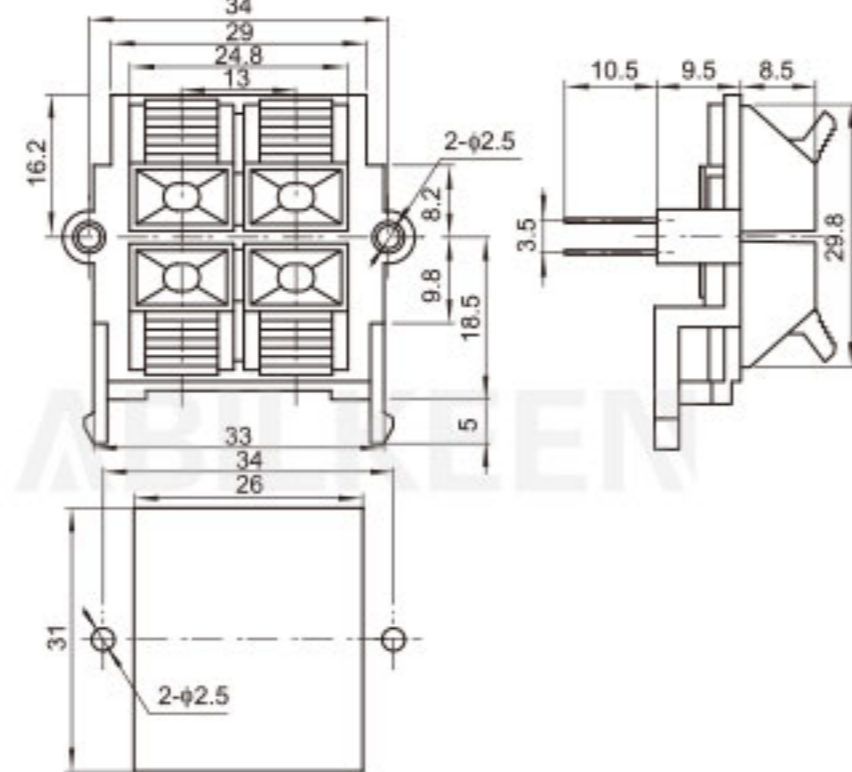


WP-080

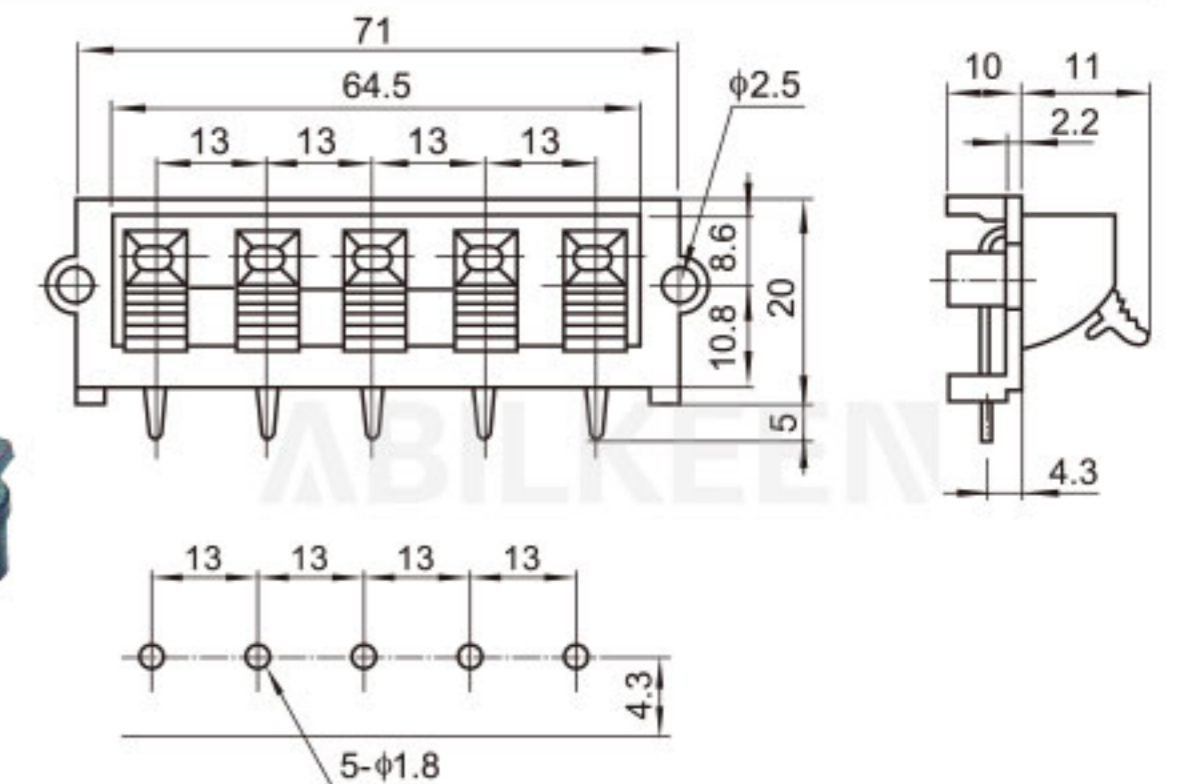



WP-071

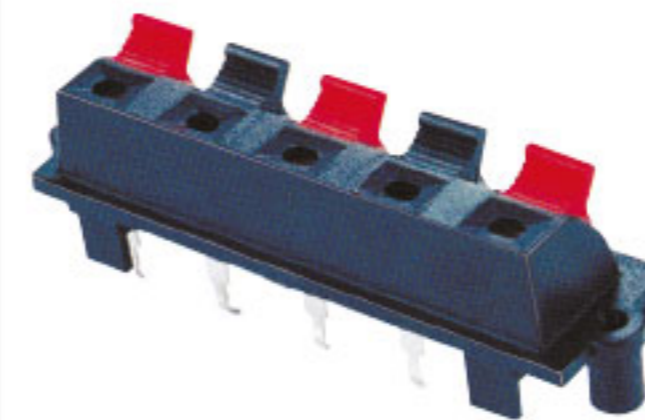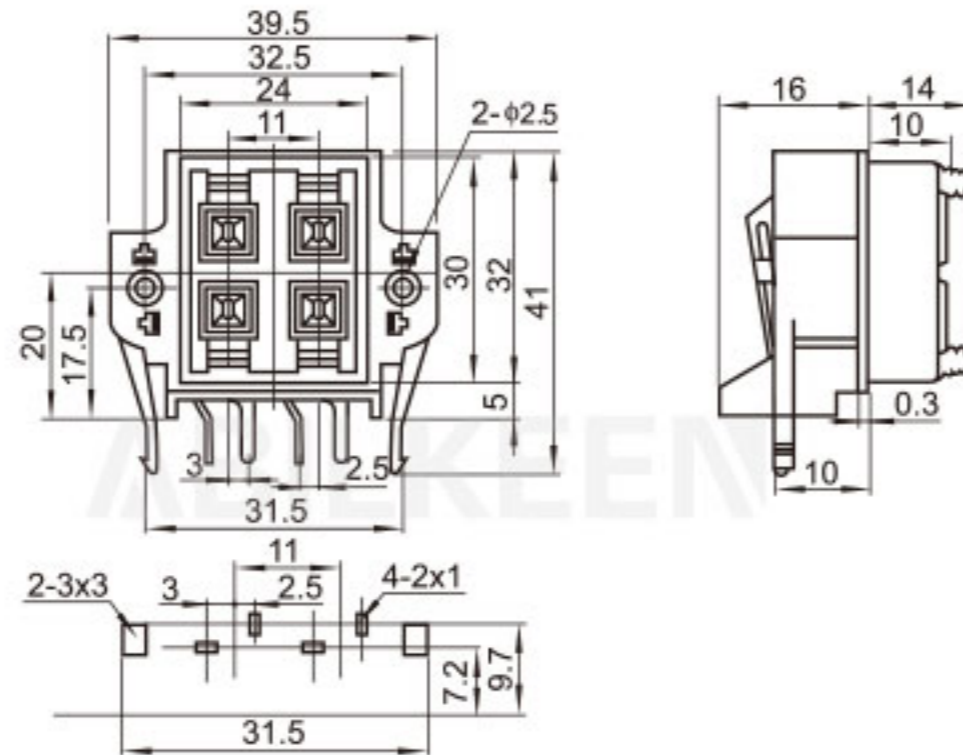



WP-081

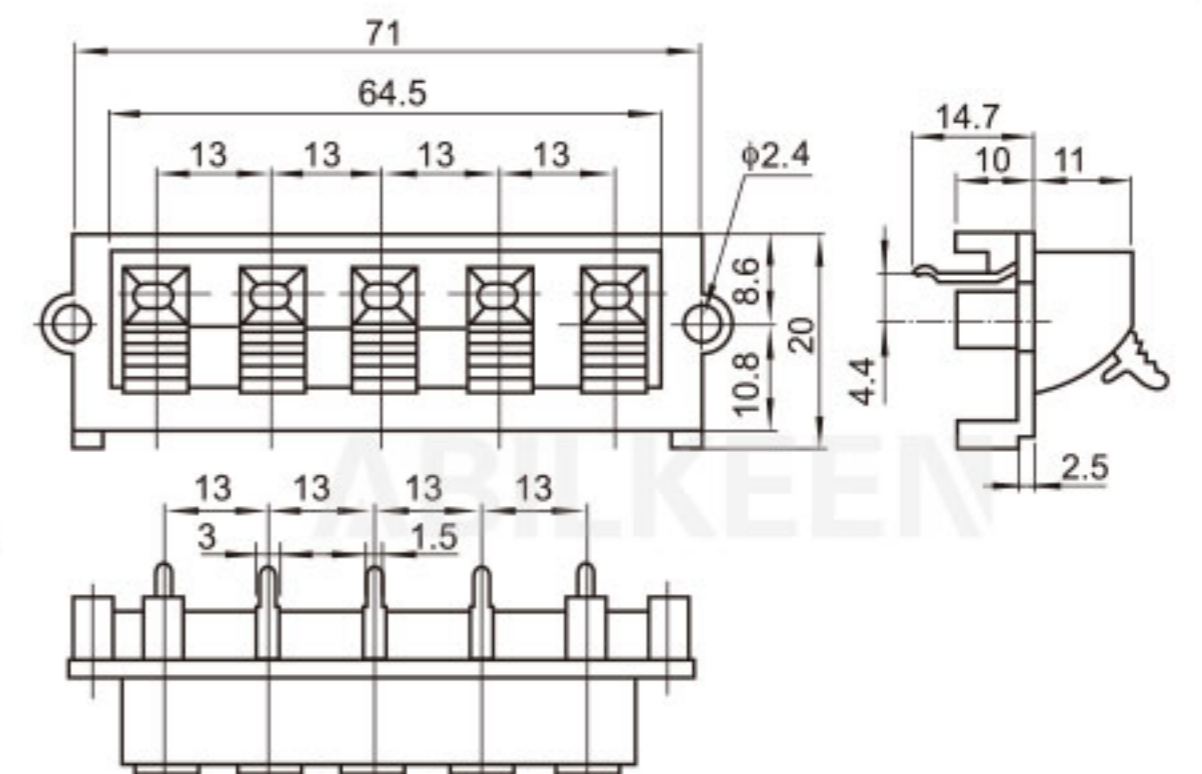



WP-073

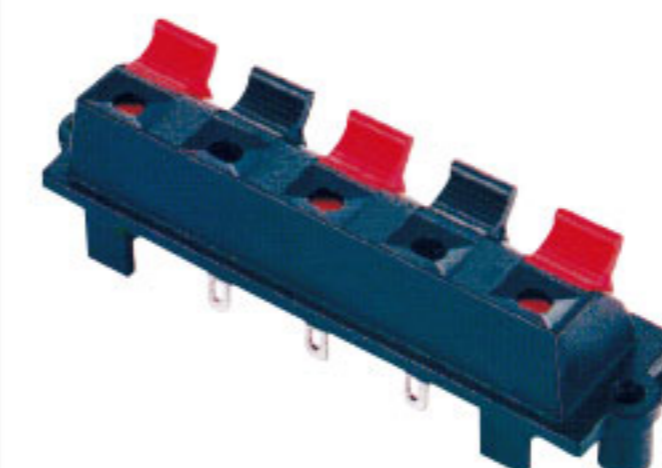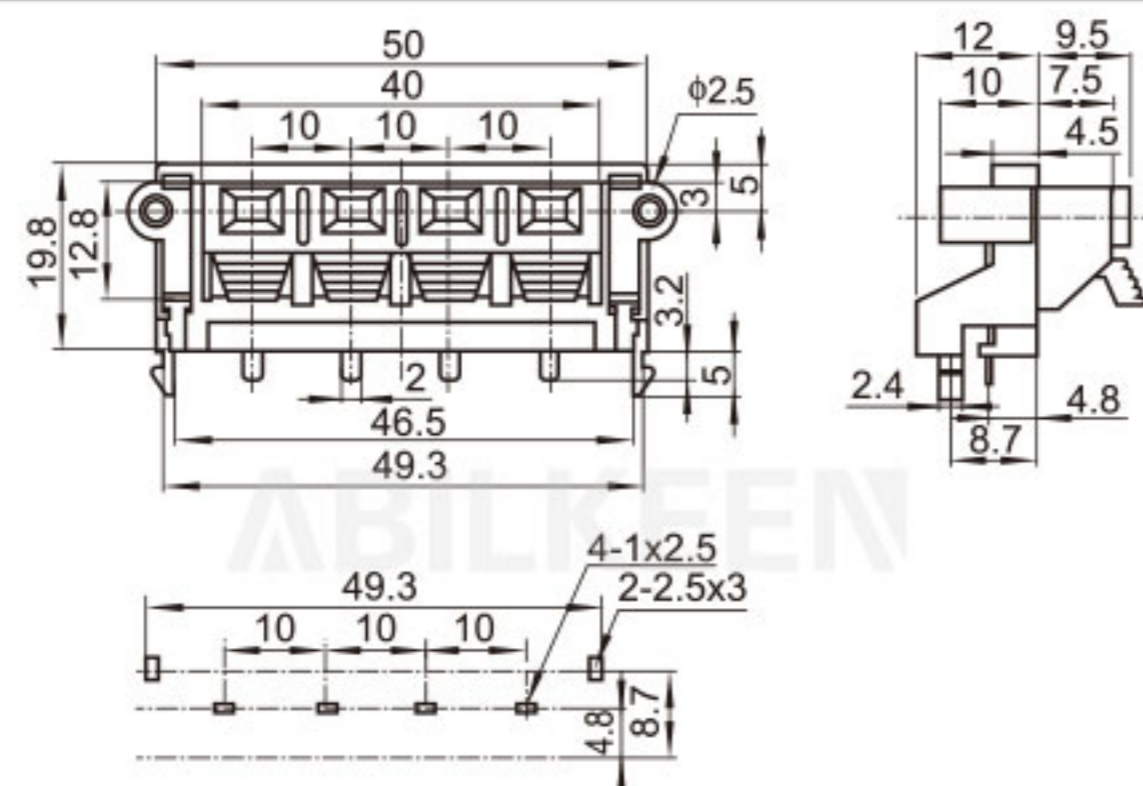

WP-082

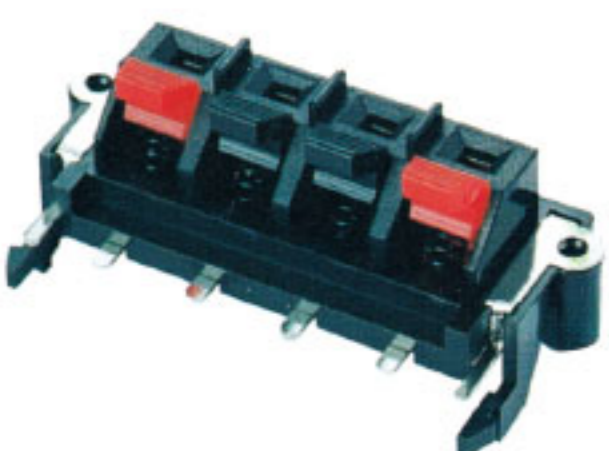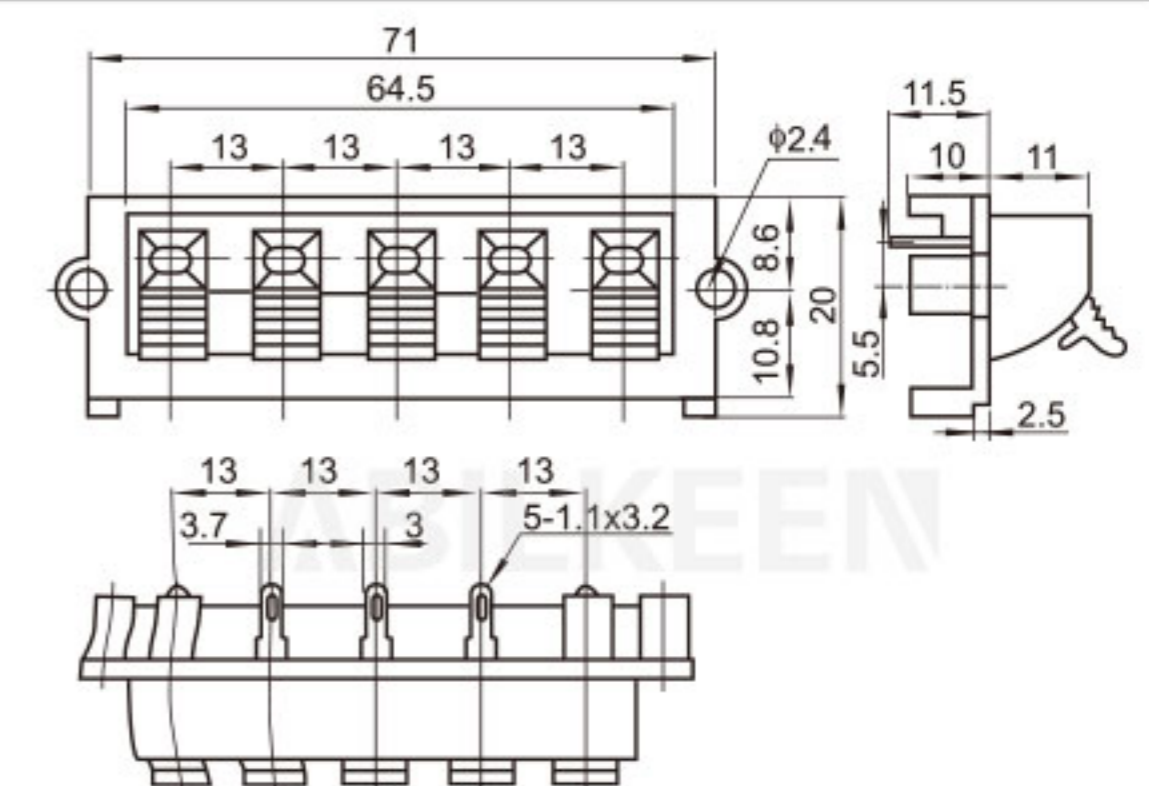

WP-074

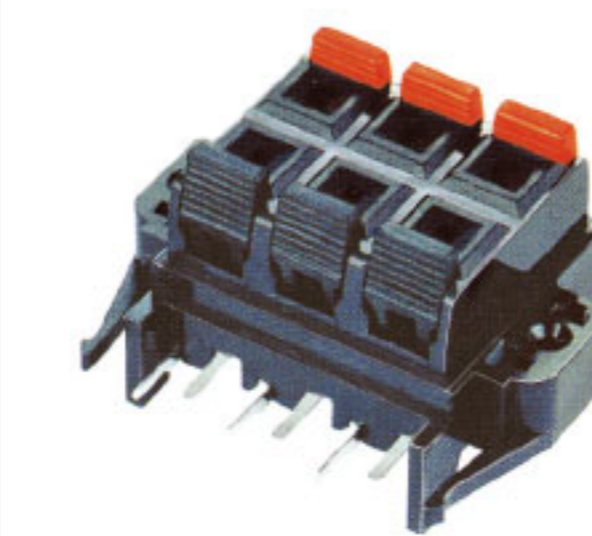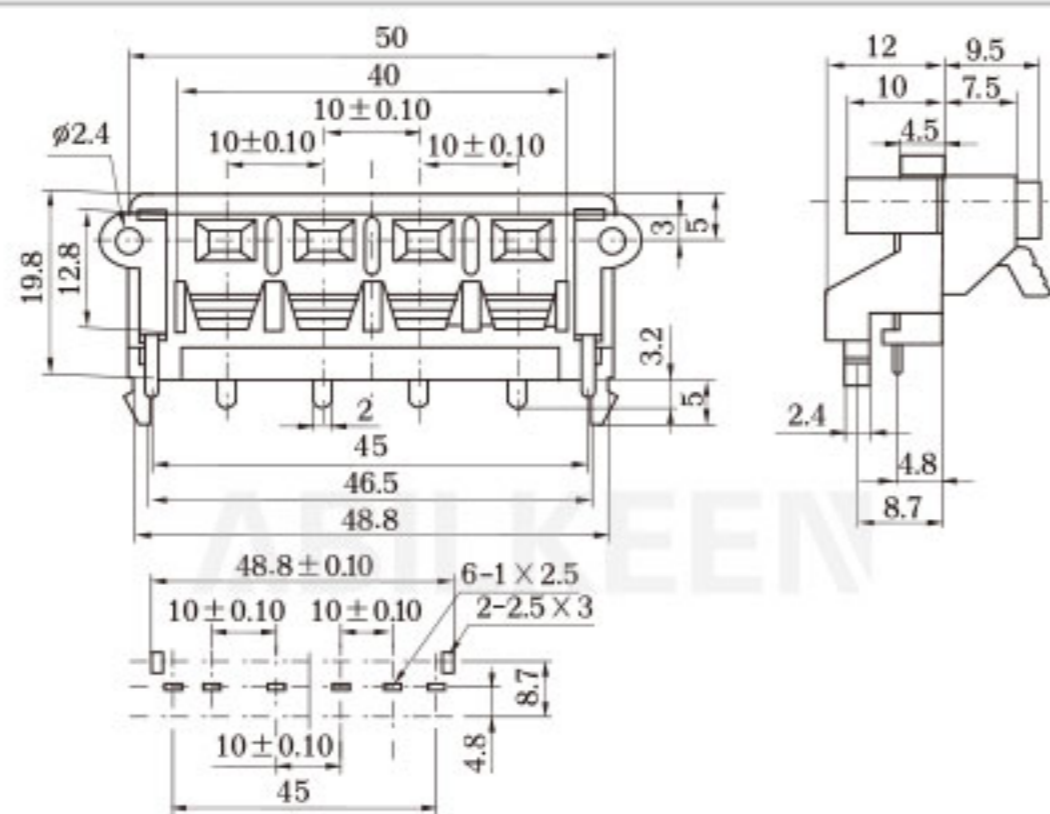

WP-083

