

INDICATOR LIGHT

指示灯

特点

- 6/8/10/12/14/16/19/22/25/28/30mm 安装孔可选
- 双色/三色可选
- 焊脚, 螺丝脚或配线脚可选
- 平头, 高头, 凹面, 球面可选
- 黄铜镀镍/不锈钢/镀铬/铝氧化多种材质

Features

- 6/8/10/12/14/16/19/22/25/28/30mm diameter optional
- Bi-color or Tri-color available
- Solder terminal, screw terminal or wire lead optional
- Flat, high, concave, ball head Shape
- Brass nickel, stainless steel, chrome, aluminum anodized optional



Indicator light description 指示灯型号说明

For Example: IB12A-PY-DB12V/N


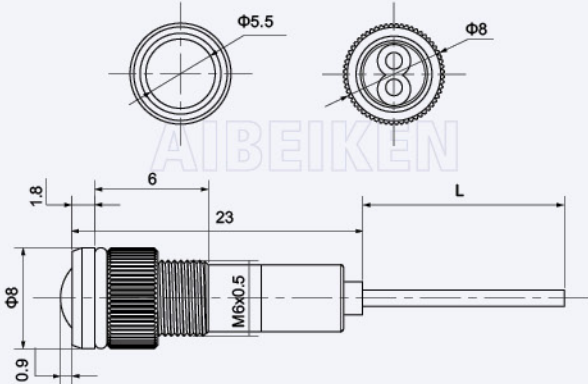

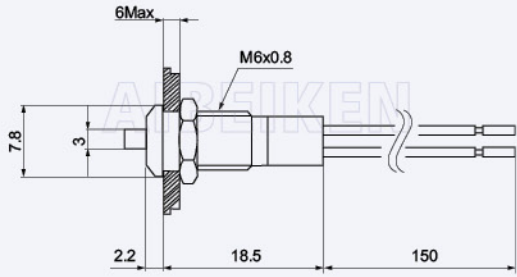

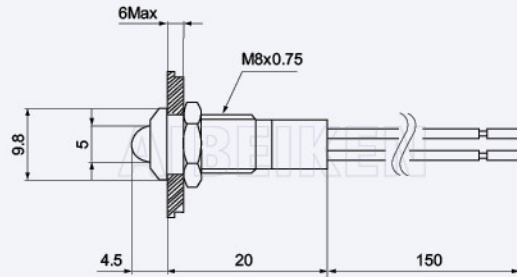

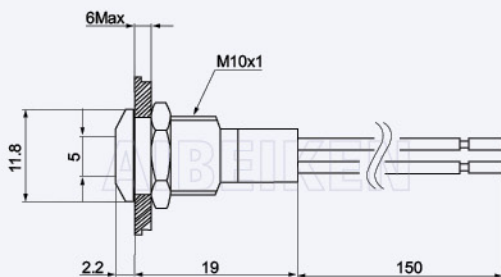
IB	○	□	—	★	■	—	○	▲	▼	/	◎
Aibeiken Code 埃贝肯代号	Mounting hole size 安装孔尺寸	Series 系列	Head shape 头部形状	Connection types 接线方式	Illumination types 带灯类型	LED color 灯珠颜色	LED voltage 灯珠电压	Housing Material 外壳材质			
IB	6: 6mm 8: 8mm 10: 10mm 12: 12mm 14: 14mm 16: 16mm 19: 19mm 22: 22mm 25: 25mm 28: 28mm 30: 30mm	A B C D E	G: High Round P: Flat Chamfer Q: Domed H: Raised F: Flat C: Concave T: Chamfer B: Ball G: 高面 P: 平斜面 Q: 弧形面 H: 凸面 F: 平面 C: 凹面 T: 斜面 B: 球面	Y: Pin Terminal J: Screw Terminal X: Wired Lead 150mm long Y: 焊接脚 J: 接线柱脚 X: 配线 150mm 长	E: Ring D: Dot *: Power Logo E*: Ring&Power logo DD: Multi-dot C: Full illuminated ZL: Logo illuminated ZK: Logo non-Illuminated E: 环形发光 D: 点式发光 *: 电源符号发光 E*: 环形和电源符号发光 DD: 多点式 C: 全圆发光 ZL: 定制符号发光 ZK: 定制符号不发光	R G B Y W O P RG RB RGB	3V 5V 6V 12V 24V 36V 48V 110V 220V 230V	N: Brass nickel S: Stainless steel A: Aluminum oxide C: Brass Chrome N: 黄铜镀镍 S: 不锈钢 A: 铝氧化 C: 黄铜镀铬			


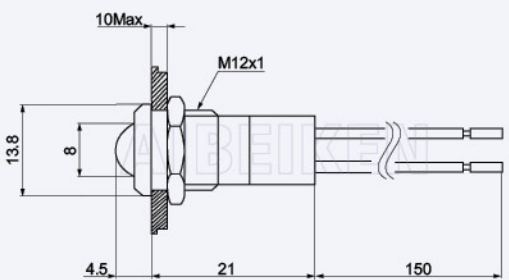

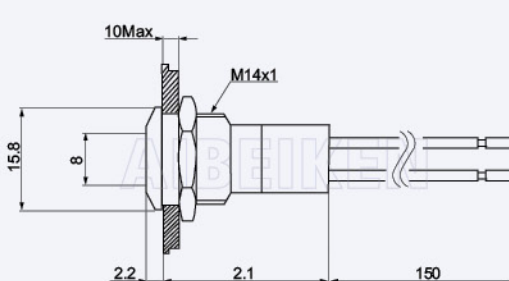

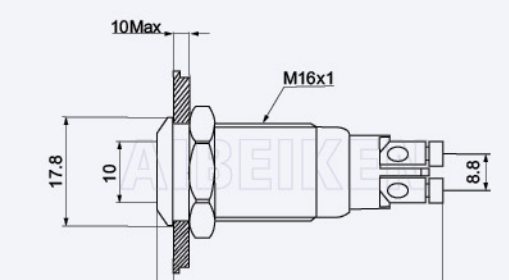

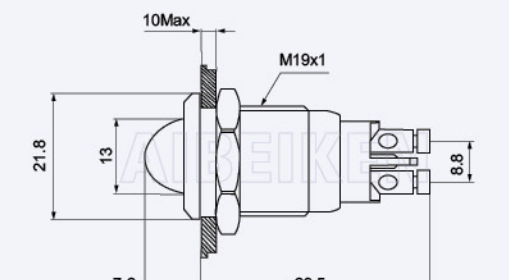
注: 请仔细阅读产品详细信息, 根据不同产品结构状态在该表中选取相应代号。

Note: Please read carefully product detailed information, according to different product structure state in the table select the corresponding code.


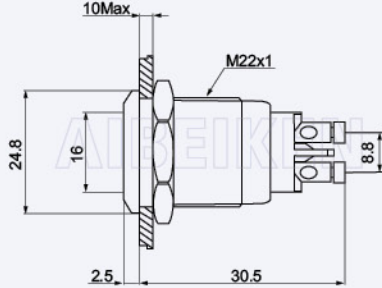

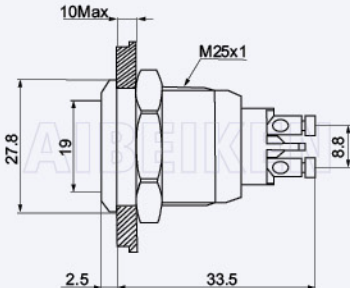

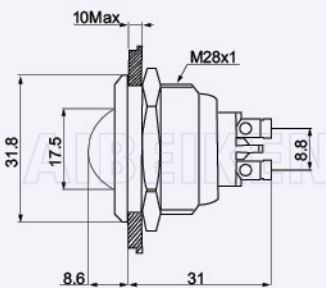

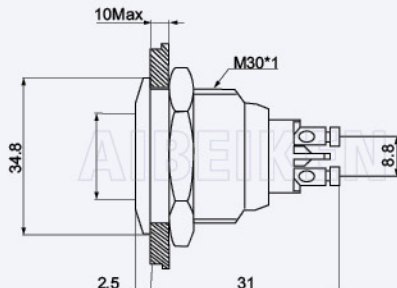




Appearance	Parameter	Outline Dimensional Drawing
 <p data-bbox="248 724 352 745">IB6C-QX-D</p>	<p data-bbox="475 396 616 418">Diameter: 6mm 孔径</p> <p data-bbox="475 433 611 454">Shape: Ball(Q) 头部形状</p> <p data-bbox="475 470 724 491">Luminous Color: R G B Y W G 发光颜色</p> <p data-bbox="475 506 764 547">Luminous Volt: 3V 5V 6V 12V 24V 36V 48V 110V 220V 发光电压</p> <p data-bbox="475 562 775 603">Crust Material: Nickel plated brass/ Stainless steel/Chrome 外壳材质: 黄铜镀镍 / 不锈钢 / 镀铬</p> <p data-bbox="475 618 735 659">Connection mode: Wired Lead 150mm long 接线方式</p> <p data-bbox="475 674 715 715">Protection Grade: IP65,IK08 防护等级</p>	
 <p data-bbox="240 1144 360 1166">IB6A-FX-D/N</p>	<p data-bbox="475 819 616 840">Diameter: 6mm 孔径</p> <p data-bbox="475 855 671 877">Shape: Flat(F)/Ball(Q) 头部形状</p> <p data-bbox="475 892 724 914">Luminous Color: R G B Y W G 发光颜色</p> <p data-bbox="475 929 764 970">Luminous Volt: 3V 5V 6V 12V 24V 36V 48V 110V 220V 发光电压</p> <p data-bbox="475 985 775 1026">Crust Material: Nickel plated brass/ Stainless steel 外壳材质</p> <p data-bbox="475 1041 735 1082">Connection mode: Wired Lead 150mm long 接线方式</p> <p data-bbox="475 1097 715 1138">Protection Grade: IP65,IK08 防护等级</p>	
 <p data-bbox="240 1565 360 1586">IB8A-QX-D/N</p>	<p data-bbox="475 1241 616 1263">Diameter: 8mm 孔径</p> <p data-bbox="475 1278 671 1300">Shape: Flat(F)/Ball(Q) 头部形状</p> <p data-bbox="475 1315 740 1336">Luminous Color: R G B Y W G R G 发光颜色</p> <p data-bbox="475 1351 764 1392">Luminous Volt: 3V 5V 6V 12V 24V 36V 48V 110V 220V 发光电压</p> <p data-bbox="475 1407 775 1448">Crust Material: Nickel plated brass/ Stainless steel 外壳材质</p> <p data-bbox="475 1463 735 1504">Connection mode: Wired Lead 150mm long 接线方式</p> <p data-bbox="475 1519 715 1560">Protection Grade: IP65,IK08 防护等级</p>	
 <p data-bbox="233 1985 368 2007">IB10A-FX-D/N</p>	<p data-bbox="475 1664 628 1685">Diameter: 10mm 孔径</p> <p data-bbox="475 1701 671 1722">Shape: Flat(F)/Ball(Q) 头部形状</p> <p data-bbox="475 1737 740 1759">Luminous Color: R G B Y W G R G 发光颜色</p> <p data-bbox="475 1774 764 1815">Luminous Volt: 3V 5V 6V 12V 24V 36V 48V 110V 220V 发光电压</p> <p data-bbox="475 1830 775 1871">Crust Material: Nickel plated brass/ Stainless steel 外壳材质</p> <p data-bbox="475 1886 735 1927">Connection mode: Wired Lead 150mm long 接线方式</p> <p data-bbox="475 1942 715 1983">Protection Grade: IP65,IK08 防护等级</p>	

Appearance	Parameter	Outline Dimensional Drawing
 <p data-bbox="236 722 363 750">IB12A-QX-D/N</p>	<p data-bbox="475 394 627 418">Diameter: 12mm 孔径</p> <p data-bbox="475 426 671 452">Shape: Flat(F)/Ball(Q) 头部形状</p> <p data-bbox="475 461 735 487">Luminous Color: R G B Y W O R 发光颜色</p> <p data-bbox="475 495 766 547">Luminous Volt: 3V 5V 6V 12V 24V 36V 48V 110V 220V 发光电压</p> <p data-bbox="475 556 775 607">Crust Material: Nickel plated brass/ Stainless steel 外壳材质</p> <p data-bbox="475 616 734 646">Connection mode: Wired Lead 150mm long 接线方式</p> <p data-bbox="475 655 715 685">Protection Grade: IP65,IK08 防护等级</p>	 <p data-bbox="877 409 1388 689">Technical drawing showing dimensions: 10Max, 13.8, 8, 4.5, 21, 150, M12x1.</p>
 <p data-bbox="236 1144 363 1172">IB14A-FX-D/N</p>	<p data-bbox="475 799 627 823">Diameter: 14mm 孔径</p> <p data-bbox="475 832 671 858">Shape: Flat(F)/Ball(Q) 头部形状</p> <p data-bbox="475 866 735 892">Luminous Color: R G B Y W O R 发光颜色</p> <p data-bbox="475 901 766 952">Luminous Volt: 3V 5V 6V 12V 24V 36V 48V 110V 220V 发光电压</p> <p data-bbox="475 961 775 1013">Crust Material: Nickel plated brass/ Stainless steel 外壳材质</p> <p data-bbox="475 1021 734 1052">Connection mode: Wired Lead 150mm long 接线方式</p> <p data-bbox="475 1060 715 1090">Protection Grade: IP65,IK08 防护等级</p>	 <p data-bbox="877 840 1388 1121">Technical drawing showing dimensions: 10Max, 15.8, 8, 2.2, 2.1, 150, M14x1.</p>
 <p data-bbox="236 1567 363 1595">IB16A-FJ-D/N</p>	<p data-bbox="475 1248 627 1272">Diameter: 16mm 孔径</p> <p data-bbox="475 1280 671 1306">Shape: Flat(F)/Ball(Q) 头部形状</p> <p data-bbox="475 1315 735 1341">Luminous Color: R G B Y W O R 发光颜色</p> <p data-bbox="475 1349 766 1401">Luminous Volt: 3V 5V 6V 12V 24V 36V 48V 110V 220V 发光电压</p> <p data-bbox="475 1410 775 1461">Crust Material: Nickel plated brass/ Stainless steel 外壳材质</p> <p data-bbox="475 1470 689 1500">Connection mode: Screw 接线方式</p> <p data-bbox="475 1504 715 1535">Protection Grade: IP65,IK08 防护等级</p>	 <p data-bbox="877 1250 1388 1530">Technical drawing showing dimensions: 10Max, 17.8, 10, 2, 32.5, 8.8, M16x1.</p>
 <p data-bbox="236 1989 363 2018">IB19A-QJ-D/N</p>	<p data-bbox="475 1653 627 1677">Diameter: 19mm 孔径</p> <p data-bbox="475 1685 671 1711">Shape: Flat(F)/Ball(Q) 头部形状</p> <p data-bbox="475 1720 735 1746">Luminous Color: R G B Y W O R 发光颜色</p> <p data-bbox="475 1754 766 1806">Luminous Volt: 3V 5V 6V 12V 24V 36V 48V 110V 220V 发光电压</p> <p data-bbox="475 1815 775 1867">Crust Material: Nickel plated brass/ Stainless steel 外壳材质</p> <p data-bbox="475 1875 689 1905">Connection mode: Screw 接线方式</p> <p data-bbox="475 1910 715 1940">Protection Grade: IP67,IK10 防护等级</p>	 <p data-bbox="877 1681 1388 1961">Technical drawing showing dimensions: 10Max, 21.8, 13, 7.2, 29.5, 8.8, M19x1.</p>



Appearance	Parameter	Outline Dimensional Drawing
 <p data-bbox="245 724 352 745">IB22A-FJ-D</p>	<p data-bbox="475 385 628 407">Diameter: 22mm 孔径</p> <p data-bbox="475 420 671 441">Shape: Flat(F)/Ball(Q) 头部形状</p> <p data-bbox="475 454 735 476">Luminous Color: R G B Y W O R 发光颜色</p> <p data-bbox="475 489 762 554">Luminous Volt: 3V 5V 6V 12V 24V 36V 48V 110V 220V 发光电压</p> <p data-bbox="475 567 775 631">Crust Material: Nickel plated brass/ Stainless steel 外壳材质</p> <p data-bbox="475 644 687 666">Connection mode: Screw 接线方式</p> <p data-bbox="475 679 715 722">Protection Grade: IP67,IK10 防护等级</p>	
 <p data-bbox="237 1136 359 1157">IB25A-FJ-D/S</p>	<p data-bbox="475 825 628 847">Diameter: 25mm 孔径</p> <p data-bbox="475 862 671 883">Shape: Flat(F)/Ball(Q) 头部形状</p> <p data-bbox="475 896 735 918">Luminous Color: R G B Y W O R 发光颜色</p> <p data-bbox="475 931 762 996">Luminous Volt: 3V 5V 6V 12V 24V 36V 48V 110V 220V 发光电压</p> <p data-bbox="475 1009 775 1073">Crust Material: Nickel plated brass/ Stainless steel 外壳材质</p> <p data-bbox="475 1086 687 1108">Connection mode: Screw 接线方式</p> <p data-bbox="475 1121 715 1164">Protection Grade: IP67,IK10 防护等级</p>	
 <p data-bbox="237 1558 359 1580">IB28A-QJ-D/S</p>	<p data-bbox="475 1248 628 1269">Diameter: 28mm 孔径</p> <p data-bbox="475 1284 671 1306">Shape: Flat(F)/Ball(Q) 头部形状</p> <p data-bbox="475 1319 735 1341">Luminous Color: R G B Y W O R 发光颜色</p> <p data-bbox="475 1353 762 1418">Luminous Volt: 3V 5V 6V 12V 24V 36V 48V 110V 220V 发光电压</p> <p data-bbox="475 1431 775 1496">Crust Material: Nickel plated brass/ Stainless steel 外壳材质</p> <p data-bbox="475 1509 687 1530">Connection mode: Screw 接线方式</p> <p data-bbox="475 1543 715 1586">Protection Grade: IP67,IK10 防护等级</p>	
 <p data-bbox="237 1979 359 2000">IB30A-FJ-D/S</p>	<p data-bbox="475 1670 628 1692">Diameter: 30mm 孔径</p> <p data-bbox="475 1707 671 1729">Shape: Flat(F)/Ball(Q) 头部形状</p> <p data-bbox="475 1742 735 1763">Luminous Color: R G B Y W O R 发光颜色</p> <p data-bbox="475 1776 762 1841">Luminous Volt: 3V 5V 6V 12V 24V 36V 48V 110V 220V 发光电压</p> <p data-bbox="475 1854 775 1918">Crust Material: Nickel plated brass/ Stainless steel 外壳材质</p> <p data-bbox="475 1931 687 1953">Connection mode: Screw 接线方式</p> <p data-bbox="475 1966 715 2009">Protection Grade: IP67,IK10 防护等级</p>	

Indicator Light

指示灯系列



IB12E-QX-C



IB16E-QX-C



IB19E-QX-C



IB22E-QX-C



IB6S-QX-D



IB8A-PX-DRGB



IB8S-PX-D



IB12S-PX-D



IB8B-CY-D



IB10B-CY-D



IB12B-CY-D



IB12B-FJ-D



IB19E-PY-C



IB16B-CJ-D



IB16B-CY-D



IB16B-FJ-D



IB22B-CJ-D



IB22B-FJ-D



IB25B-FJ-D



IB25B-PJ-D

Indicator Light
指示灯系列

AIBEIKEN